



## LEGISLATIVE MEMORANDUM

**TO:** Honorable Mayor and Members of the City Council

**FROM:** Suzanne Sherman, City Manager

**THRU:** John Pearson, Chief Building Official

**DATE:** 12/21/2023

**RE:** Ordinance 2023-104, amending the Code of Ordinances, Chapter 96, Florida Building Code, Subchapter 'Building Code', by updating references to the Florida Building Code, final reading.

A public hearing is to be held on the above subject ordinance and the caption read for the second and final time at tonight's Council meeting.

Staff has submitted a request to amend the Code of Ordinances Chapter 96 Florida Building Codes. The amendment includes:

1 - Subchapter "Building Code" to update references to the State mandated 8<sup>th</sup> Edition Florida Building Codes (2023) as required by Florida Statutes and the city's administrative amendments to the 2023 Florida Building Code 2023-Building, Chapter 1, Administration as outlined in Exhibit A. and;

2 - The State mandated edition of the National Electrical Code (2020) and the section of the 2023 National Electrical Code as outlined in Exhibit B.

The attached Ordinance has been prepared for consideration.

**REQUESTING DEPARTMENT:**

Building Department

**FISCAL IMPACT:**

None.

**RECOMMENDATION:**

Motion to approve the amendment and Ordinance, as it is required for compliance with Florida State Law.

**ATTACHMENTS:**

**Description**

Ordinance 2023-104

Ordinance 2023-104, Exhibit A

Ordinance 2023-104, Exhibit B

## ORDINANCE 2023-104

AN ORDINANCE OF THE CITY OF PALM BAY, BREVARD COUNTY, FLORIDA, AMENDING THE CODE OF ORDINANCES, TITLE IX, GENERAL REGULATIONS, CHAPTER 96, FLORIDA BUILDING CODE, SUBCHAPTER 'BUILDING CODE', BY UPDATING REFERENCES TO THE FLORIDA BUILDING CODE; PROVIDING FOR THE REPEAL OF ORDINANCES OR PARTS OF ORDINANCES IN CONFLICT HERewith; PROVIDING FOR INCLUSION IN THE CITY OF PALM BAY CODE OF ORDINANCES; PROVIDING FOR A SEVERABILITY CLAUSE; PROVIDING FOR AN EFFECTIVE DATE.

BE IT ENACTED BY THE CITY COUNCIL OF THE CITY OF PALM BAY, BREVARD COUNTY, FLORIDA, as follows:

**SECTION 1.** The City of Palm Bay Code of Ordinances, Title IX, General Regulations, Chapter 96, Florida Building Code, Subchapter 'Building Code', Section 96.01, Adopted, is hereby amended and shall henceforth read as follows:

**"Section 96.01 ADOPTED.**

(A) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>,<< Edition or as amended - Building mandated by the State of Florida, and exclusive of Chapter 1 - Administration, is hereby recognized as the Building Code for the city.

(1) The city's administrative amendments to the >>2023<< Florida Building Code - Building, Chapter 1, Administration, are hereby adopted, and by reference, incorporated herein >>and provided<< as Exhibit A 04-20-23, and made a part of this section as if fully set forth herein. >>A copy of the 2023 Florida Building Code shall be available for reference thru the City Clerk's Office.<<

(B) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>,<< Edition or as amended - Residential mandated by the State of Florida is hereby recognized as the Residential Building Code for the city.

(C) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>,<< Edition or as amended - Plumbing mandated by the State of Florida is hereby recognized as the Plumbing Code for the city.

(D) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>,<< Edition or as amended - Mechanical mandated by the State of Florida is hereby recognized as the Mechanical Code for the city.

(E) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>, << Edition or as amended  
- Fuel Gas mandated by the State of Florida is hereby recognized as the Fuel Gas Code for the city.

(F) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>, << Edition or as amended  
- Existing Building mandated by the State of Florida is hereby recognized as the Existing Building Code for the city.

(G) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>, << Edition or as amended  
- Accessibility mandated by the State of Florida is hereby recognized as the Accessibility Code for the city.

(H) >>2023<< Florida Building Code 7<sup>th</sup> >>, 8<sup>th</sup>, << Edition or as amended  
- Energy Conservation mandated by the State of Florida is hereby recognized as the Energy Conservation Code for the city.

(I) 2017 >>2020<< or as amended National Electrical Code - Electrical mandated by the State of Florida >>, and exclusive of Article 210.52, << is hereby recognized as the Electrical Code for the City.

>>(1) Article 210.52 of the 2023 National Electrical Code is hereby adopted and, by reference, incorporated herein and provided as Exhibit B. A copy of Article 210.52 shall be available for reference thru the City Clerk's Office.<<

\* \* \*

**SECTION 2.** All ordinances or parts of ordinances in conflict herewith are hereby repealed and all ordinances or parts of ordinances not in conflict herewith are hereby continued in full force and effect.

**SECTION 3.** It is the intention of the City Council of the City of Palm Bay that the provisions of this Ordinance shall be made a part of the City of Palm Bay Code of Ordinances and the sections may be renumbered to accomplish such intention.

**SECTION 4.** If any portion, clause, phrase, sentence or classification of this ordinance is held or declared to be either unconstitutional, invalid, inapplicable, inoperative or void, then such declaration shall not be construed to affect other portions of the ordinance; it is hereby declared to be the express opinion of the City Council of the

City of Palm Bay that any such unconstitutional, invalid, inapplicable, inoperative or void portion or portions of this ordinance did not induce its passage, and that without the inclusion of any such portion or portions of this ordinance, the City Council would have enacted the valid constitutional portions thereof.

**SECTION 5.** The provisions within this ordinance shall take effect December 31, 2023.

Read in title only at Meeting 2023-XX, held on \_\_\_\_\_, 2023; and read in title only and duly enacted at Meeting 2023-XX, held on \_\_\_\_\_, 2023.

\_\_\_\_\_  
Rob Medina, MAYOR

ATTEST:

\_\_\_\_\_  
Terese M. Jones, CITY CLERK

Reviewed by CAO: \_\_\_\_\_

***Strikethrough words shall be deleted; highlighted words that will included will be placed in between two arrow symbols (>> <<). Deletions and additions constitute the proposed amendment. Words remaining are now in effect and remain unchanged.***



CITY OF PALM BAY ADMINISTRATIVE CODE  
CHAPTER 1  
FOR THE 8<sup>th</sup> Edition (2023) FLORIDA BUILDING CODE

**Approved by City Council  
12/xx/2023 with an effective date of  
12/31/2023.**

BOAF Model Administrative Code – 8<sup>th</sup> Edition (2023)

The Building Officials Association of Florida is proud to present this model document for use by its members as a tool to facilitate the uniform and consistent application of local amendments to the administrative provisions of the Florida Building Code. Every effort has been made to present the amendments in mandatory language format. The language that is shaded represents those text revisions approved by the BOAF Board of Directors.

Copyright Notice

**ALL RIGHTS RESERVED.** The BOAF Model Administrative Code contains substantial material owned and copyrighted by International Code Council. The ICC has granted a non-exclusive license to the Florida Department of Business and Professional Regulation to make the Florida Building Code available. This material is made available through the BOAF web site in order that members may have a tool for the integration of administrative provisions from the Florida Building Code and the 2021 International Building Code.

Reproduction and use of those portions of the code containing ICC copyrighted material is limited by agreement with the State of Florida. Reproduction and distribution of ICC copyrighted material by private individuals, including, without limitation, electronic, optical, mechanical or any other means whatsoever, is expressly prohibited without the express written consent of ICC.

**TRADEMARKS.** "ICC" and the "ICC" logo are trademarks of the International Code Council, Incorporated.

**Legend:**

Plain Text is from the FBC 8<sup>th</sup> Edition (2023)

**Shaded Text is the amended text based on BOAF recommendations.**

**CHAPTER 1**  
**SCOPE AND ADMINISTRATION**

**PART 1—SCOPE AND APPLICATION**

**SECTION 101**

**GENERAL**

**101.1 Title.** These regulations shall be known as the *Florida Building Code*, hereinafter referred to as “this code.”

**101.2 Scope.** The provisions of this code shall apply to the construction, *alteration*, relocation, enlargement, replacement, *repair*, equipment, use and occupancy, location, maintenance, removal and demolition of every building or structure or any appurtenances connected or attached to such buildings or structures.

**Exceptions:**

1. Detached one-and two-family *dwelling*s and multiple single-family *dwelling*s (*townhouses*) not more than three *stories above grade plane* in height with a separate *means of egress*, and their accessory structures not more than three *stories above grade plane* in height, shall comply with *this Code or the Florida Building Code, Residential*.
2. Code requirements that address snow loads and earthquake protection shall not be utilized or enforced.

**101.2.1 Appendices.** Provisions in the appendices shall not apply unless specifically adopted. The City of Palm Bay adopts Florida Building Code, Residential, Appendices M and Q.

**101.2.2** Residential construction standards or practices which are not covered by Florida Building Code, Residential volume shall be in accordance with the provisions of Florida Building Code, Building.

**101.3 Intent.** The purpose of this code is to establish the minimum requirements to provide a reasonable level of safety, public health and general welfare through structural strength, *means of egress* facilities, stability, sanitation, adequate light and ventilation, energy conservation, and safety to life and property from fire and other hazards attributed to the built environment and to provide a reasonable level of safety to fire fighters and emergency responders during emergency operations.

**101.3.1 Quality control.** Quality control of materials and workmanship is not within the purview of this code except as it relates to the purposes stated herein.

**101.3.2 Warranty and Liability.** The permitting, plan review or inspection of any building, system or plan by this jurisdiction, under the requirements of this code, shall not be construed in any court as a warranty of the physical condition of such building, system or plan or their adequacy. This jurisdiction shall not be liable in tort for damages or hazardous or illegal condition or inadequacy in such building, system or plan, nor for any failure of any component of such, which may occur subsequent to such inspection or permitting.

**101.4 Referenced codes.** The other codes listed in Sections 101.4.1 through 101.4.9 and referenced elsewhere in this code shall be considered part of the requirements of this code to the prescribed extent of each such reference.

**101.4.1 Gas.** The provisions of the *Florida Building Code, Fuel Gas* shall apply to the installation of gas piping from the point of delivery, gas appliances and related accessories as covered in this code. These requirements apply to gas piping systems extending from the point of delivery to the inlet connections of appliances and the installation and operation of residential and commercial gas appliances and related accessories.

**101.4.2 Mechanical.** The provisions of the *Florida Building Code, Mechanical* shall apply to the installation, *alterations, repairs* and replacement of mechanical systems, including equipment, appliances, fixtures, fittings and/or appurtenances, including ventilating, heating, cooling, air-conditioning and refrigeration systems, incinerators and other energy related systems.

**101.4.3 Plumbing.** The provisions of the *Florida Building Code, Plumbing* shall apply to the installation, *alteration, repair* and replacement of plumbing systems, including equipment, appliances, fixtures, fittings and appurtenances, and where connected to a water or sewage system and all aspects of a medical gas system.

**101.4.4 Property maintenance.** The provisions of the *City of Palm Bay Code of Ordinances* shall apply to existing structures and premises; equipment and facilities; light, ventilation, space heating, sanitation, life and fire safety hazards; responsibilities of owners, operators and occupants; and occupancy of existing premises and structures.

**101.4.5 Fire prevention.** For provisions related to fire prevention, refer to the *Florida Fire Prevention Code*. The *Florida Fire Prevention Code* shall apply to matters affecting or relating to structures, processes and premises from the hazard of fire and explosion arising from the storage, handling or use of structures, materials or devices; from conditions hazardous to life, property or public welfare in the occupancy of structures or premises; and from the construction, extension, *repair, alteration* or removal of fire suppression, *automatic sprinkler systems* and alarm systems or fire hazards in the structure or on the premises from occupancy or operation.

**101.4.6 Energy.** The provisions of the *Florida Building Code, Energy Conservation* shall apply to all matters governing the design and construction of buildings for energy efficiency.

**101.4.7 Existing buildings.** The provisions of the *Florida Building Code, Existing Building* shall apply to matters governing the *repair, alteration*, change of occupancy, *addition* to and relocation of existing buildings.

**101.4.8 Accessibility.** For provisions related to accessibility, refer to the *Florida Building Code, Accessibility*.

**101.4.9 Manufactured buildings.** For additional administrative and special code requirements, see Section 458, *Florida Building Code, Building*, and Rule 61-41 F.A.C.

## SECTION 102 APPLICABILITY

**102.1 General.** Where there is a conflict between a general requirement and a specific requirement, the specific requirement shall be applicable. Where, in any specific case, different sections of this code specify different materials, methods of construction or other requirements, the most restrictive shall govern.

**102.1.1** *The Florida Building Code* does not apply to, and no code enforcement action shall be brought with respect to, zoning requirements, land use requirements and owner specifications or programmatic requirements which do not pertain to and govern the design, construction, erection, alteration, modification, repair or demolition of public or private buildings, structures or facilities or to programmatic requirements that do not pertain to enforcement of the *Florida Building Code*. Additionally, a local code enforcement agency may not administer or enforce the *Florida Building Code, Building* to prevent the siting of any publicly owned facility, including, but not limited to, correctional facilities, juvenile justice facilities, or state universities, community colleges, or public education facilities, as provided by law.

**102.2 Building.** The provisions of the *Florida Building Code* shall apply to the construction, erection, alteration, modification, repair, equipment, use and occupancy, location, maintenance, removal and demolition of every public and private building, structure or facility or floating residential structure, or any appurtenances connected or attached to such buildings, structures or facilities. Additions, alterations, repairs and changes of use or occupancy group in all buildings and structures shall comply with the provisions provided in the *Florida Building Code, Existing Building*. The following buildings, structures and facilities are exempt from the *Florida Building Code* as provided by law, and any further exemptions shall be as determined by the legislature and provided by law:

- (a) Building and structures specifically regulated and preempted by the federal government.
- (b) Railroads and ancillary facilities associated with the railroad.
- (c) Nonresidential farm buildings on farms.
- (d) Temporary buildings or sheds used exclusively for construction purposes.
- (e) Mobile or modular structures used as temporary offices, except that the provisions of Part II (Sections 553.501-553.513, *Florida Statutes*) relating to accessibility by persons with disabilities shall apply to such mobile or modular structures. *Permits* shall be required for structural support and tie-down, electric supply and all other such utility connections to such mobile or modular structures as required by this jurisdiction.
- (f) Those structures or facilities of electric utilities, as defined in Section 366.02, *Florida Statutes*, which are directly involved in the generation, transmission, or distribution of electricity.



- (g) Temporary sets, assemblies, or structures used in commercial motion picture or television production, or any sound-recording equipment used in such production, on or off the premises.
- (h) Chickees constructed by the Miccosukee Tribe of Indians of Florida or the Seminole Tribe of Florida. As used in this paragraph, the term “chickee” means an open-sided wooden hut that has a thatched roof of palm or palmetto or other traditional materials, and that does not incorporate any electrical, plumbing, or other nonwood features.
- (i) Family mausoleums not exceeding 250 square feet (23 m<sup>2</sup>) in area which are prefabricated and assembled on site or preassembled and delivered on site and have walls, roofs, and a floor constructed of granite, marble, or reinforced concrete.
- (j) Temporary housing provided by the Department of Corrections to any prisoner in the state correctional system.
- (k) A building or structure having less than 1,000 square feet (93 m<sup>2</sup>) which is constructed and owned by a natural person for hunting and which is repaired or reconstructed to the same dimension and condition as existed on January 1, 2011, if the building or structure:
  - 1. Is not rented or leased or used as a principal residence;
  - 2. Is not located within the 100-year flood plain according to the Federal Emergency Management Agency’s current Flood Insurance Rate Map; and
  - 3. Is not connected to an off-site electric power or water supply.
- (l) A drone port as defined in s. 330.41(2).

**102.2.1** In addition to the requirements of Sections 553.79 and 553.80, *Florida Statutes*, facilities subject to the provisions of Chapter 395, *Florida Statutes*, and Part II of Chapter 400, *Florida Statutes*, shall have facility plans reviewed and construction surveyed by the state agency authorized to do so under the requirements of Chapter 395, *Florida Statutes*, and Part II of Chapter 400, *Florida Statutes*, and the certification requirements of the federal government.

**102.2.2** Residential buildings or structures moved into or within a county or municipality shall not be required to be brought into compliance with the state minimum building code in force at the time the building or structure is moved, provided:

- 1. The building or structure is structurally sound and in occupiable condition for its intended use;
- 2. The occupancy use classification for the building or structure is not changed as a result of the move;
- 3. The building is not substantially remodeled;
- 4. Current fire code requirements for ingress and egress are met;
- 5. Electrical, gas and plumbing systems meet the codes in force at the time of construction and are operational and safe for reconnection; and
- 6. Foundation plans are sealed by a professional engineer or architect licensed to practice in this state, if required by the *Florida Building Code, Building* for all residential buildings or structures of the same occupancy class.

**See Florida Building Code, Existing Building Chapter 13 for additional requirements for Relocated or Moved Buildings**

**102.2.3** The *building official* shall apply the same standard to a moved residential building or structure as that applied to the remodeling of any comparable residential building or structure to determine whether the moved structure is substantially remodeled. The cost of the foundation on which the moved building or structure is placed shall not be included in the cost of remodeling for purposes of determining whether a moved building or structure has been substantially remodeled.

**102.2.4** This section does not apply to the jurisdiction and authority of the Department of Agriculture and Consumer Services to inspect amusement rides or the Department of Financial Services to inspect state-owned buildings and boilers.

**102.2.5** Each enforcement district or local enforcement agency shall be governed by a board, the composition of which shall be determined by the affected localities.

- 1. At its own option, each enforcement district or local enforcement agency may adopt rules granting to the owner of a single-family residence one or more exemptions from the *Florida Building Code* relating to:

- a. Addition, alteration, or repairs performed by the property owner upon his or her own property, provided any addition, alteration or repair shall not exceed 1,000 square feet (93 m<sup>2</sup>) or the square footage of the primary structure, whichever is less.
  - b. Addition, alteration, or repairs by a nonowner within a specific cost limitation set by rule, provided the total cost shall not exceed \$5,000 within any 12-month period.
  - c. Building plans review and inspection fees.
2. However, the exemptions under subparagraph 1 do not apply to single-family residences that are located in mapped *flood hazard areas*, as defined in the code, unless the enforcement district or local enforcement agency has determined that the work, which is otherwise exempt, does not constitute a substantial improvement, including the repair of substantial damage, of such single-family residences.
  3. Each code exemption, as defined in sub-subparagraphs 1a, 1b, and 1c shall be certified to the local board 10 days prior to implementation and shall only be effective in the territorial jurisdiction of the enforcement district or local enforcement agency implementing it.

**102.2.6** This section does not apply to swings and other playground equipment accessory to a one- or two-family dwelling.

**Exception:** Electrical service to such playground equipment shall be in accordance with Chapter 27 of this code.

**102.3 Application of references.** References to chapter or section numbers, or to provisions not specifically identified by number, shall be construed to refer to such chapter, section or provision of this code.

**102.4 Referenced codes and standards.** The codes and standards referenced in this code shall be considered part of the requirements of this code to the prescribed extent of each such reference and as further regulated in Sections 102.4.1 and 102.4.2.

**102.4.1 Conflicts.** Where conflicts occur between provisions of this code and referenced codes and standards, the provisions of this code shall apply.

**102.4.2 Provisions in referenced codes and standards.** Where the extent of the reference to a referenced code or standard includes subject matter that is within the scope of this code or the Florida Codes listed in Section 101.4, the provisions of this code or the Florida Codes listed in Section 101.4, as applicable, shall take precedence over the provisions in the referenced code or standard.

**102.5 Partial invalidity.** In the event that any part or provision of this code is held to be illegal or void, this shall not have the effect of making void or illegal any of the other parts or provisions.

**102.6 Existing structures.** The legal occupancy of any structure existing on the date of adoption of this code shall be permitted to continue without change, except as otherwise specifically provided in this code, the *Florida Building Code, Existing Building*, *City of Palm Bay Code of Ordinances*, or the *Florida Fire Prevention Code*.

**102.6.1 Buildings not previously occupied.** A building or portion of a building that has not been previously occupied or used for its intended purpose in accordance with the laws in existence at the time of its completion shall comply with the provisions of the *Florida Building Code, Building* or *Florida Building Code, Residential*, as applicable, for new construction or with any current *permit* for such occupancy.

**102.6.2 Buildings previously occupied.** The legal occupancy of any building existing on the date of adoption of this code shall be permitted to continue without change, except as otherwise specifically provided in this code, the *Florida Fire Prevention Code*, *the City of Palm Bay Code of Ordinances*, or as is deemed necessary by the *building official* for the general safety and welfare of the occupants and the public.

**102.7 Relocation of manufactured buildings.**

- (1) Relocation of an existing manufactured building does not constitute an alteration.

- (2) A relocated building shall comply with wind speed requirements of the new location, using the appropriate wind speed map. If the existing building was manufactured in compliance with the Standard Building Code (prior to March 1, 2002), the wind speed map of the Standard Building Code shall be applicable. If the existing building was manufactured in compliance with the *Florida Building Code* (on or after March 1, 2002), the wind speed map of the *Florida Building Code* shall be applicable.
- (3) A relocated building shall comply with the *flood hazard area* requirements of the new location, if applicable.

**102.8 Existing mechanical equipment.** An agency or local government may not require that existing mechanical equipment located on or above the surface of a roof be installed in compliance with the requirements of the *Florida Building Code* except during reroofing when the equipment is being replaced or moved and is not in compliance with the provisions of the *Florida Building Code* relating to roof-mounted mechanical units.

## PART 2—ADMINISTRATION AND ENFORCEMENT

### SECTION 103

#### DEPARTMENT OF BUILDING SAFETY

**103.1 Creation of enforcement agency.** The Department of Building Safety is hereby created and the official in charge thereof shall be known as the *building official*.

**103.2 Appointment.** The *building official* shall be appointed by the chief appointing authority of the jurisdiction.

**103.3 Deputies.** In accordance with the prescribed procedures of this jurisdiction and with the concurrence of the appointing authority, the *building official* shall have the authority to appoint a deputy *building official*, the related technical officers, inspectors, plan examiners and other employees. Such employees shall have powers as delegated by the *building official*.

For the maintenance of existing properties, see the City of Palm Bay Code of Ordinances.

### SECTION 104

#### DUTIES AND POWERS OF BUILDING OFFICIAL

**104.1 General.** The *building official* is hereby authorized and directed to enforce the provisions of this code. The *building official* shall have the authority to render interpretations of this code and to adopt policies and procedures in order to clarify the application of its provisions. Such interpretations, policies and procedures shall be in compliance with the intent and purpose of this code. Such policies and procedures shall not have the effect of waiving requirements specifically provided for in this code.

**104.2 Applications and permits.** The *building official* shall receive applications, review *construction documents* and issue *permits* for the erection, and *alteration*, demolition and moving of buildings and structures, inspect the premises for which such *permits* have been issued and enforce compliance with the provisions of this code.

**104.2.1 Determination of substantially improved or substantially damaged existing buildings and structures in flood hazard areas.** For applications for reconstruction, rehabilitation, *repair*, *alteration*, *addition* or other improvement of existing buildings or structures located in *flood hazard areas*, the *building official* shall determine if the proposed work constitutes substantial improvement or *repair* of *substantial damage*. Where the *building official* determines that the proposed work constitutes *substantial improvement* or *repair* of *substantial damage*, and where required by this code, the *building official* shall require the building to meet the requirements of Section 1612 or R322 of the Florida Building Code, Residential, as applicable.

**104.3 Notices and orders.** The *building official* shall issue all necessary notices or orders to ensure compliance with this code.

**104.4 Inspections.** The *building official* shall make all of the required inspections, or the *building official* shall have the authority to accept reports of inspection by *approved agencies* or individuals. Reports of such inspections shall be in writing and be certified by a responsible officer of such *approved agency* or by the responsible individual. The *building official* is authorized to engage such expert opinion as deemed necessary to report upon unusual technical issues that arise, subject to the approval of the appointing authority.

**104.5 Identification.** The *building official* shall carry proper identification when inspecting structures or premises

in the performance of duties under this code.

**104.6 Right of entry.** Where it is necessary to make an inspection to enforce the provisions of this code, or where the *building official* has reasonable cause to believe that there exists in a structure or upon a premises a condition which is contrary to or in violation of this code which makes the structure or premises unsafe, dangerous or hazardous, the *building official* is authorized to enter the structure or premises at reasonable times to inspect or to perform the duties imposed by this code, provided that if such structure or premises be occupied that credentials be presented to the occupant and entry requested. If such structure or premises is unoccupied, the *building official* shall first make a reasonable effort to locate the owner or other person having charge or control of the structure or premises and request entry. If entry is refused, the *building official* shall have recourse to the remedies provided by law to secure entry.

**104.7 Department records.** The *building official* shall keep official records of applications received, *permits* and certificates issued, fees collected, reports of inspections, and notices and orders issued. Such records shall be retained in the official records for the period required for retention of public records per FS 119.

**104.8 Liability.** The *building official*, member of the board of appeals or employee charged with the enforcement of this code, while acting for the jurisdiction in good faith and without malice in the discharge of the duties required by this code or other pertinent law or ordinance, shall not thereby be civilly or criminally rendered liable personally and is hereby relieved from personal liability for any damage accruing to persons or property as a result of any act or by reason of an act or omission in the discharge of official duties. Any suit instituted against an officer or employee because of an act performed by that officer or employee in the lawful discharge of duties and under the provisions of this code shall be defended by legal representative of the jurisdiction until the final termination of the proceedings. The *building official* or any subordinate shall not be liable for cost in any action, suit or proceeding that is instituted in pursuance of the provisions of this code.

**104.8.1 Legal defense.** Any suit or criminal complaint instituted against an officer or employee because of an act performed by that officer or employee in the lawful discharge of duties and under the provisions of this code shall be defended by legal representatives of the jurisdiction until the final termination of the proceedings. The *building official* or any subordinate shall not be liable for cost in any action, suit or proceeding that is instituted in pursuance of the provisions of this code.

**104.9 Approved materials and equipment.** Materials, equipment and devices *approved* by the *building official* shall be constructed and installed in accordance with such approval.

**104.9.1 Used materials and equipment.** The use of used materials that meet the requirements of this code for new materials is permitted. Used equipment and devices shall not be reused unless *approved* by the *building official*.

**104.10 Modifications.** Wherever there are practical difficulties involved in carrying out the provisions of this code, the *building official* shall have the authority to grant modifications for individual cases, upon application of the owner or owner's representative, provided the *building official* shall first find that special individual reason makes the strict letter of this code impractical and the modification is in compliance with the intent and purpose of this code and that such modification does not lessen health, accessibility, life and fire safety, or structural requirements. The details of action granting modifications shall be recorded and entered in the files of the department of building safety.

**104.10.1 Flood hazard areas.** The *building official* shall coordinate with the floodplain administrator to review requests submitted to the *building official* that seek approval to modify the strict application of the flood resistant construction requirements of the *Florida Building Code* to determine whether such requests require the granting of a variance pursuant to Section 117.

**104.11 Alternative materials, design and methods of construction and equipment.** The provisions of this code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by this code, provided that any such alternative has been approved. An alternative material, design or method of construction shall be approved where the building official finds that the proposed alternative meets all of the following:

1. The alternative material, design or method of construction is satisfactory and complies with the intent of the provisions of this code.
2. The material, method or work offered is, for the purpose intended, not less than the equivalent of that prescribed in this code as it pertains to the following:

- 2.1. Quality.
- 2.2. Strength.
- 2.3. Effectiveness.
- 2.4. Fire resistance.
- 2.5. Durability.
- 2.6. Safety.

Where the alternative material, design or method of construction is not approved, the building official shall respond in writing, stating the reasons why the alternative was not approved.

**104.11.1 Research reports.** Supporting data, where necessary to assist in the approval of materials or assemblies not specifically provided for in this code, shall consist of valid research reports from *approved* sources.

**104.11.2 Tests.** Whenever there is insufficient evidence of compliance with the provisions of this code, or evidence that a material or method does not conform to the requirements of this code, or in order to substantiate claims for alternative materials or methods, the *building official* shall have the authority to require tests as evidence of compliance to be made at no expense to the jurisdiction. Test methods shall be as specified in this code or by other recognized test standards. In the absence of recognized and accepted test methods, the *building official* shall approve the testing procedures. Tests shall be performed by an *approved agency*. Reports of such tests shall be retained by the *building official* for the period required for retention of public records.

**104.12 Requirements not covered by code.** Any requirements necessary for strength, stability or proper operation of an existing or proposed building, structure, electrical, gas, mechanical or plumbing system, or for the public safety, health and general welfare, not specifically covered by this or other technical codes, shall be determined by the *building official*.

## SECTION 105 PERMITS

**105.1 Required.** Any *owner* or owner's authorized agent who intends to construct, enlarge, alter, *repair*, move, demolish or change the occupancy of a building or structure, or to erect, install, enlarge, alter, *repair*, remove, convert or replace any impact-resistant coverings, electrical, gas, mechanical or plumbing system, the installation of which is regulated by this code, or to cause any such work to be performed, shall first make application to the *building official* and obtain the required *permit*.

**105.1.1 Annual facility permit.** In lieu of an individual *permit* for each *alteration* to an existing electrical, gas, mechanical, plumbing or interior nonstructural office system(s), the *building official* is authorized to issue an annual *permit* for any occupancy to facilitate routine or emergency service, repair, refurbishing, minor renovations of service systems or manufacturing equipment installations/relocations. The *building official* shall be notified of major changes and shall retain the right to make inspections at the facility site as deemed necessary. An annual facility *permit* shall be assessed with an annual fee and shall be valid for one year from date of issuance. A separate *permit* shall be obtained for each facility and for each construction trade, as applicable. The *permit* application shall contain a general description of the parameters of work intended to be performed during the year.

**105.1.2 Annual Facility permit records.** The person to whom an annual *permit* is issued shall keep a detailed record of *alterations* made under such annual *permit*. The *building official* shall have access to such records at all times or such records shall be filed with the *building official* as designated.

**105.1.3 Food permit.** In accordance with Section 500.12, *Florida Statutes*, a food *permit* from the Department of Agriculture and Consumer Services is required of any person who operates a food establishment or retail store.

**105.1.4 Public swimming pool.** The local enforcing agency may not issue a building permit to construct, develop, or modify a public swimming pool without proof of application, whether complete or incomplete, for an operating *permit* pursuant to Section 514.031, *Florida Statutes*. A certificate of completion or occupancy may not be issued until such operating *permit* is issued. The local enforcing agency shall conduct their review of the building *permit* application upon filing and in accordance with Chapter 553, *Florida Statutes*. The local enforcing agency may confer with the Department of Health, if necessary, but may not delay the building *permit* application review while awaiting comment from the Department of Health.

**105.2 Work exempt from permit.** Exemptions from *permit* requirements of this code shall not be deemed to grant authorization for any work to be done in any manner in violation of the provisions of this code or any other laws or ordinances of this jurisdiction, to include work in any special *flood hazard area*. Exemptions granted under this section do not relieve the owner or contractor from their duty to comply with applicable provisions of the Florida Building Code, and requirements of the *local floodplain management ordinance*. *Permits* shall not be required for the following:

**Building:**

1. One-story detached accessory structures used as tool and storage sheds, playhouses and similar uses, provided the floor area does not exceed 120 square feet (11 m<sup>2</sup>).
2. Fences not over 6 feet (1829 mm) high.
3. Oil derricks.
4. Retaining walls that are not over 4 feet (1219 mm) in height measured from the bottom of the footing to the top of the wall, unless supporting a surcharge or impounding Class I, II or IIIA liquids.
5. Water tanks supported directly on grade if the capacity does not exceed 5,000 gallons (18 925 L) and the ratio of height to diameter or width does not exceed 2:1.
6. Sidewalks and driveways not more than 30 inches (762 mm) above adjacent grade, and not over any basement or *story* below and are not part of an *accessible route*.
7. Painting, papering, tiling, carpeting, cabinets, counter tops and similar finish work.
8. Temporary motion picture, television and theater stage sets and scenery.
9. Prefabricated swimming pools accessory to a Group R-3 occupancy that are less than 24 inches (610 mm) deep, do not exceed 5,000 gallons (18 925 L) and are installed entirely above ground.
10. Shade cloth structures constructed for nursery or agricultural purposes, not including service systems.
11. Swings and other playground equipment accessory to detached one- and two-family *dwelling* except for the electrical service.
12. Window *awnings* supported by an *exterior wall* that do not project more than 54 inches (1372 mm) from the *exterior wall* and do not require additional support, of Groups R-3 and U occupancies.
13. Non-fixed and movable fixtures, cases, racks, counters and partitions not over 5 feet 9 inches (1753 mm) in height.

**Electrical:**

**Repairs and maintenance:** Minor repair work, including the replacement of lamps or the connection of *approved* portable electrical equipment to *approved* permanently installed receptacles.

**Radio and television transmitting stations:** The provisions of this code shall not apply to electrical equipment used for radio and television transmissions, but do apply to equipment and wiring for a power supply and the installations of towers and antennas.

**Temporary testing systems:** A *permit* shall not be required for the installation of any temporary system required for the testing or servicing of electrical equipment or apparatus.

**Gas:**

1. Portable heating appliance.
2. Replacement of any minor part that does not alter approval of equipment or make such equipment unsafe.

**Mechanical:**

1. Portable heating appliance.
2. Portable ventilation equipment.
3. Portable cooling unit.
4. Steam, hot or chilled water piping within any heating or cooling equipment regulated by this code.
5. Replacement of any part that does not alter its approval or make it unsafe.
6. Portable evaporative cooler.
7. Self-contained refrigeration system containing 10 pounds (4.54 kg) or less of refrigerant and actuated by motors of 1 horsepower (0.75 kW) or less.
8. The installation, replacement, removal or metering of any load management control device.

**Plumbing:**

1. The stopping of leaks in drains, water, soil, waste or vent pipe, provided, however, that if any concealed trap, drain pipe, water, soil, waste or vent pipe becomes defective and it becomes necessary to remove and replace the same with new material, such work shall be considered as new work and a *permit* shall be obtained and inspection made as provided in this code.
2. The clearing of stoppages or the repairing of leaks in pipes, valves or fixtures and the removal and reinstallation of water closets, provided such repairs do not involve or require the replacement or rearrangement of valves, pipes or fixtures.

**105.2.1 Emergency repairs.** Where equipment replacements and repairs must be performed in an emergency situation, the *permit* application shall be submitted within the next working business day to the *building official*.

**105.2.2 Minor repairs.** Ordinary minor repairs may be made with the approval of the *building official* without a *permit*, provided the repairs do not include the cutting away of any wall, partition or portion thereof, the removal or cutting of any structural beam or load-bearing support, or the removal or change of any required *means of egress*, or rearrangement of parts of a structure affecting the egress requirements; nor shall ordinary repairs include *addition* to, *alteration* of, replacement or relocation of any standpipe, water supply, sewer, drainage, drain leader, gas, soil, waste, vent or similar piping, electric wiring systems or mechanical equipment or other work affecting public health or general safety, and such repairs shall not violate any of the provisions of the technical codes.

**105.2.3 Public service agencies.** A *permit* shall not be required for the installation, *alteration* or repair of generation, transmission, distribution or metering or other related equipment that is under the ownership and control of public service agencies by established right.

**105.3 Application for *permit*.** To obtain a *permit*, the applicant shall first file an application therefor in writing on a form furnished by the building department for that purpose.

*Permit* application forms shall be in the format prescribed by a local administrative board, if applicable, and must comply with the requirements of Sections 713.135(5) and (6), *Florida Statutes*.

Each application shall be inscribed with the date of application, and the code in effect as of that date. For a building *permit* for which an application is submitted prior to the effective date of the *Florida Building Code*, the state minimum building code in effect in the permitting jurisdiction on the date of the application governs the permitted work for the life of the *permit* and any extension granted to the *permit*.

Effective October 1, 2017, a local enforcement agency shall post each type of building *permit* application on its website. Completed applications must be able to be submitted electronically to the appropriate building department. Accepted methods of electronic submission include, but are not limited to, e-mail submission of applications in portable document format or submission of applications through an electronic fill-in form available on the building department's website or through a third-party submission management software. Payments, attachments, or drawings required as part of the application may be submitted in person in a nonelectronic format, at the discretion of the *building official*.

**105.3.1 Action on application.** The *building official* shall examine or cause to be examined applications for *permits* and amendments thereto within a reasonable time after filing. If the application or the *construction documents* do not conform to the requirements of pertinent laws, the *building official* shall reject such application in writing, stating the reasons therefor. If the *building official* is satisfied that the proposed work conforms to the requirements of this code and laws and ordinances applicable thereto, the *building official* shall issue a *permit* therefor as soon as practicable. When authorized through contractual agreement with a school board, in acting on applications for *permits*, the *building official* shall give first priority to any applications for the construction of, or addition or renovation to, any school or educational facility.

**105.3.1.1** If a state university, Florida college or public school district elects to use a local government's code enforcement offices, fees charged by counties and municipalities for enforcement of the *Florida Building Code* on buildings, structures, and facilities of state universities, state colleges, and public school districts shall not be more than the actual labor and administrative costs incurred for plans review and inspections to ensure compliance with the code.

**105.3.1.2** No *permit* may be issued for any building construction, erection, alteration, modification, repair, or addition unless the applicant for such *permit* provides to the enforcing agency which issues the *permit* any of the following documents which apply to the construction for which the *permit* is to be issued and which shall be prepared by or under the direction of an engineer registered under Chapter 471, *Florida Statutes*:

1. Plumbing documents for any new building or addition which requires a plumbing system with more than 250 fixture units or which costs more than \$125,000.
2. Fire sprinkler documents for any new building or addition which includes a fire sprinkler system which contains 50 or more sprinkler heads. Personnel as authorized by chapter 633 *Florida Statutes*, may design a new fire protection system of 49 or fewer sprinklers; may design the alteration of an existing fire sprinkler system if the alteration consists of the relocation, addition or deletion of 249 or fewer sprinklers and the addition of up to 49 sprinklers, as long as the cumulative total number of fire sprinklers being added, relocated, or deleted does not exceed 249, notwithstanding the size of the existing fire sprinkler system; or may design the alteration of an existing fire sprinkler system if the alteration consists of the relocation or deletion of 249 or fewer sprinklers, notwithstanding the size of the existing fire sprinkler system, if there is no change of occupancy of the affected areas, as defined in this Code and the Florida Fire Prevention Code, and there is no change in the water demand as defined in NFPA 13, "Standard for the Installation of Sprinkler Systems," and if the occupancy hazard classification as defined in NFPA 13 is reduced or remains the same as a result of the alteration.
3. Heating, ventilation, and air-conditioning documents for any new building or addition which requires more than a 15-ton-per-system capacity which is designed to accommodate 100 or more persons or for which the system costs more than \$125,000. This paragraph does not include any document for the replacement or repair of an existing system in which the work does not require altering a structural part of the building or for work on a residential one-, two-, three-, or four-family structure.

An air-conditioning system may be designed by an installing air-conditioning contractor certified under Chapter 489, *Florida Statutes*, to serve any building or addition which is designed to accommodate fewer than 100 persons and requires an air-conditioning system with a value of \$125,000 or less; and when a 15-ton-per system or less is designed for a singular space of a building and each 15-ton system or less has an independent duct system. Systems not complying with the above require design documents that are to be sealed by a professional engineer.

**Example 1:** When a space has two 10-ton systems with each having an independent duct system, the contractor may design these two systems since each unit (system) is less than 15 tons.

**Example 2:** Consider a small single-story office building which consists of six individual offices where each office has a single three-ton package air conditioning heat pump. The six heat pumps are connected to a single water cooling tower. The cost of the entire heating, ventilation and air-conditioning work is \$47,000 and the office building accommodates fewer than 100 persons. Because the six mechanical units are connected to a common water tower, this is considered to be an 18-ton system.

**Note:** It was further clarified by the Commission that the limiting criteria of 100 persons and \$125,000 apply to the building occupancy load and the cost for the total air-conditioning system of the building.



4. Any specialized mechanical, electrical, or plumbing document for any new building or addition which includes a medical gas, oxygen, steam, vacuum, toxic air filtration, halon, or fire detection and alarm system which costs more than \$5,000.

**Exception:**

Simplified permitting processes.

(1) As used in this section, the term:

(a) "Component" means valves, fire sprinklers, escutcheons, hangers, compressors, or any other item deemed acceptable by the local enforcing agency. For purposes of this paragraph, a valve does not include pressure-regulating, pressure-reducing, or pressure-control valves.

(b) "Contractor" means a person who:

1. Is qualified to engage in the business of electrical or alarm system contracting pursuant to a certificate or registration issued by the department under part II of chapter 489, Florida Statutes; or
2. Is qualified to engage in the business of fire protection system contracting pursuant to a license or certificate issued by the State Fire Marshal.

(c) "Fire alarm system project" means a fire alarm system alteration of a total of 20 or fewer initiating devices and notification devices, or the installation or replacement of a fire communicator connected to an existing fire alarm control panel in an existing commercial, residential, apartment, cooperative, or condominium building.

(d) "Fire sprinkler system project" means a fire protection system alteration of a total of 20 or fewer fire sprinklers in which the sprinklers are of the same K-factor and located in spaces where there is no change of hazard classification or increased system coverage area, or the installation or replacement of an equivalent fire sprinkler system component in an existing commercial, residential, apartment, cooperative, or condominium building. For purposes of this paragraph, a component is equivalent if the component has the same or better characteristics, including electrical, hydraulic, pressure losses, and required listings and spacing as the component being replaced.

(2)(a) A local enforcement agency may require a contractor, as a condition of obtaining a *permit* for a fire alarm system project or fire sprinkler system project, to submit a completed application and payment.

(b) A local enforcement agency may not require a contractor to submit plans or specifications as a condition of obtaining a *permit* for a fire alarm system project or fire sprinkler system project.

(3) A local enforcement agency must issue a *permit* for a fire alarm system project or fire sprinkler system project in person or electronically.

(4) A local enforcement agency must require at least one inspection of a fire alarm system project or fire sprinkler system project to ensure compliance with applicable codes and standards. If a fire alarm system project or fire sprinkler system project fails an inspection, the contractor must take corrective action as necessary to pass inspection.

(5) (a) For a fire sprinkler alarm system project, a contractor must keep a copy of the plans and specifications at the fire alarm system project worksite and make such plans and specifications available to the inspector at each inspection.

(b) For a fire sprinkler system project to alter an existing fire protection system, a contractor must keep a copy of the plans and specifications at the fire sprinkler system project worksite and make such plans and specifications available to the inspector at each inspection.

(c) For a fire sprinkler system project to install or replace a component, a contractor must keep a copy of the manufacturer's installation instructions and any pertinent testing instructions needed to certify or accept the component at the fire sprinkler system project worksite and make such documents available to the inspector at each inspection.

5. Electrical documents. See *Florida Statutes* 471.003(2)(h). Any electrical or plumbing or air-conditioning and refrigeration system meeting the following thresholds are required to be designed by a Florida Registered Engineer. The system, requires an electrical system with a value of over \$125,000; and Requires an aggregate service capacity of over 600 amperes (240 volts) on a residential electrical system or over 800 amperes (240

volts) on a commercial or industrial electrical system;

**Note:** It was further clarified by the Commission that the limiting factor of 240 volt or over is required to be designed by an Engineer. Documents requiring an engineer seal by this part shall not be valid unless a professional engineer who possesses a valid certificate of registration has signed, dated, and stamped such document as provided in Section 471.025, *Florida Statutes*.

6. All public swimming pools and public bathing places defined by and regulated under Chapter 514, *Florida Statutes*.

#### **105.3.1.3 Reviewing application for building permit.**

1. When reviewing an application for a building *permit*, a local government may not request additional information from the applicant more than three times, unless the applicant waives such limitation in writing.
2. If a local government requests additional information from an applicant and the applicant submits the requested additional information to the local government within 30 days after receiving the request, the local government must, within 15 days after receiving such information:
  - a. Determine if the application is properly completed;
  - b. Approve the application;
  - c. Approve the application with conditions;
  - d. Deny the application; or
  - e. Advise the applicant of information, if any, that is needed to deem the application properly completed or to determine the sufficiency of the application.
3. If a local government makes a second request for additional information from the applicant and the applicant submits the requested additional information to the local government within 30 days after receiving the request, the local government must, within 10 days after receiving such information:
  - a. Determine if the application is properly completed;
  - b. Approve the application;
  - c. Approve the application with conditions;
  - d. Deny the application; or
  - e. Advise the applicant of information, if any, that is needed to deem the application properly completed or to determine the sufficiency of the application.
4. Before a third request for additional information may be made, the applicant must be offered an opportunity to meet with the local government to attempt to resolve outstanding issues. If a local government makes a third request for additional information from the applicant and the applicant submits the requested additional information to the local government within 30 days after receiving the request, the local government must, within 10 days after receiving such information unless the applicant waived the local government's limitation in writing, determine that the application is complete and:
  - a. Approve the application;
  - b. Approve the application with conditions; or
  - c. Deny the application.
5. If the applicant believes the request for additional information is not authorized by ordinance, rule, statute, or other legal authority, the local government, at the applicant's request, must process the application and either approve the application, approve the application with conditions, or deny the application.

**105.3.2 Time limitation of application.** An application for a *permit* for any proposed work shall be deemed to have been abandoned **becoming null and void** 180 days after the date of filing, unless such application has been pursued in good faith or a *permit* has been issued; except that the *building official* is authorized to grant one or more extensions of time for additional periods not exceeding 90 days each. The extension shall be requested in writing and justifiable cause demonstrated.

**105.3.3** An enforcing authority may not issue a building *permit* for any building construction, erection, alteration, modification, repair or addition unless the *permit* either includes on its face or there is attached to the *permit* the following statement: "NOTICE: In addition to the requirements of this *permit*, there may be additional restrictions applicable to this property that may be found in the public records of this county, and there may be additional *permits* required from other governmental entities such as water management districts, state agencies, or federal agencies."

**105.3.4** A building *permit* for a single-family residential dwelling must be issued within 30 working days of application therefor unless unusual circumstances require a longer time for processing the application or unless the *permit* application fails to satisfy the *Florida Building Code* or the enforcing agency's laws or ordinances.

**105.3.5 Identification of minimum premium policy.** Except as otherwise provided in Chapter 440, *Florida Statutes*, Workers' Compensation, every employer shall, as a condition to receiving a building *permit*, show proof that it has secured compensation for its employees as provided in Sections 440.10 and 440.38, *Florida Statutes*.

**105.3.6 Asbestos removal.** Moving, removal or disposal of asbestos-containing materials on a residential building where the owner occupies the building, the building is not for sale or lease, and the work is performed according to the owner-builder limitations provided in this paragraph. To qualify for exemption under this paragraph, an owner must personally appear and sign the building *permit* application. The permitting agency shall provide the person with a disclosure statement in substantially the following form:

**Disclosure Statement:** State law requires asbestos abatement to be done by licensed contractors. You have applied for a *permit* under an exemption to that law. The exemption allows you, as the owner of your property, to act as your own asbestos abatement contractor even though you do not have a license. You must supervise the construction yourself. You may move, remove or dispose of asbestos-containing materials on a residential building where you occupy the building and the building is not for sale or lease, or the building is a farm outbuilding on your property. If you sell or lease such building within 1 year after the asbestos abatement is complete, the law will presume that you intended to sell or lease the property at the time the work was done, which is a violation of this exemption. You may not hire an unlicensed person as your contractor. Your work must be done according to all local, state and federal laws and regulations which apply to asbestos abatement projects. It is your responsibility to make sure that people employed by you have licenses required by state law and by county or municipal licensing ordinances.

**105.3.7 Applicable Code for Manufactured Buildings.** Manufacturers should be permitted to complete all buildings designed and *approved* prior to the effective date of a new code edition, provided a clear signed contract is in place. The contract shall provide specific data mirroring that required by an application for *permit*, specifically, without limitation, date of execution, building owner or dealer, and anticipated date of completion. However, the construction activity must commence within 6 months of the contract's execution. The contract is subject to verification by the Department of Business and Professional Regulation.

**105.3.8** A local government may not require a contract between a builder and an owner for the issuance of a building *permit* or as a requirement for the submission of a building *permit* application.

**105.3.9 Public right of way.** A *permit* shall not be given by the *building official* for the construction of any building, or for the alteration of any building where said building is to be changed and such change will affect the exterior walls, bays, balconies, or other appendages or projections fronting on any street, alley or public lane, or for the placing on any lot or premises of any building or structure removed from another lot or premises, unless the applicant has received a right of way *permit* from the authority having jurisdiction over the street, alley or public lane.

**105.4 Conditions of the *permit*.** The issuance or granting of a *permit* shall not be construed to be a *permit* for, or an approval of, any violation of any of the provisions of this code or of any other ordinance of the jurisdiction. *Permits* presuming to give authority to violate or cancel the provisions of this code or other ordinances of the jurisdiction shall not be valid. The issuance of a *permit* based on *construction documents* and other data shall not prevent the *building official* from requiring the correction of errors in the *construction documents* and other data. The *building official* is also authorized to prevent occupancy or use of a structure where in violation of this code or of any other ordinance of this jurisdiction.

**105.4.1 *Permit* intent.** A *permit* issued shall be construed to be a license to proceed with the work and not as authority to violate, cancel, alter or set aside any of the provisions of the technical codes, nor shall issuance of a *permit* prevent the *building official* from thereafter requiring a correction of errors in plans, construction or violations of this code. Every *permit* issued shall become invalid unless the work authorized by such *permit* is commenced within 6 months after its issuance, or if the work authorized by such *permit* is suspended or abandoned for a period of 6 months after the time the work is commenced.

**105.4.1.1** If work has commenced and the *permit* is revoked, becomes null and void, or expires because of lack of progress or abandonment, a new *permit* covering the proposed construction shall be obtained before proceeding with the work.

**105.4.1.2** If a new *permit* is not obtained within 180 days from the date the initial *permit* became null and void, the *building official* is authorized to require that any work which has been commenced or completed be removed from the building site. Alternately, a new *permit* may be issued on application, providing the work in place and required to complete the structure meets all applicable regulations in effect at the time the initial *permit* became null and void and any regulations which may have become effective between the date of expiration and the date of issuance of the new *permit*.

**105.4.1.3** Work shall be considered to be in active progress when the *permit* has received an *approved* inspection within 180 days. This provision shall not be applicable in case of civil commotion or strike or when the building work is halted due directly to judicial injunction, order or similar process.

**105.4.1.4** The fee for renewal reissuance and extension of a *permit* shall be set forth by the administrative authority.

**105.4.1.5** After the local enforcing agency issues a permit, the local enforcing agency may not make or require any substantive changes to the plans or specifications except changes required for compliance with the Florida Building Code, the Florida Fire Prevention Code, or the Life Safety Code, or local amendments thereto. If a local enforcing agency makes or requires substantive changes to the plans or specifications after a permit is issued, the local enforcing agency must identify the specific plan features that do not comply with the applicable codes, identify the specific code chapters and sections upon which the finding is based, and provide the information to the permit holder in writing.

**105.5 Expiration.** Every *permit* issued shall become invalid unless the work on the site authorized by such *permit* is commenced within 180 days after its issuance, or if the work authorized on the site by such *permit* holder and property owner shall be responsible to either complete all work in accordance with the permitted plans and inspection or remove any partially completed work in a safe and code compliant manner. The *building official* is authorized to grant, in writing, one or more extensions of time, for periods not more than 180 days each. The extension shall be requested in writing and justifiable cause demonstrated as determined by the *building official*.

**105.5.1 Additional options for closing a *permit*.** Pursuant to Section 553.79(15), Florida Statutes, a property owner, regardless of whether the property owner is the one listed on the application for the building *permit*, may close a building *permit* by complying with the following requirements:

1. The property owner may retain the original contractor listed on the permit or hire a different contractor appropriately licensed in this state to perform the work necessary to satisfy the conditions of the permit and to obtain any necessary inspection in order to close the *permit*. If a contractor other than the original contractor listed on the *permit* is hired by the property owner to close the *permit*, such contractor is not liable for any defects in the work performed by the original contractor and is only liable for the work that he or she performs.
2. The property owner may assume the role of an owner-builder, in accordance with Sections 489.103(7) and 489.503(6), *Florida Statutes*.
3. If a building *permit* is expired and its requirements have been substantially completed, as determined by the local enforcement agency, the *permit* may be closed without having to obtain a new building *permit*, and the work required to close the *permit* may be done pursuant to the building code in effect at the time the local enforcement agency received the application for the *permit*, unless the contractor has sought and received approval from the local enforcement agency for an alternative material, design or method of construction.
4. A local enforcement agency may close a building *permit* 6 years after the issuance of the *permit*, even in the absence of a final inspection, if the local enforcement agency determines that no apparent safety hazard exists.

For purposes of this section, the term “close” means that the requirements of the *permit* have been satisfied.

**105.5.2** For the purposes of this subsection, a *closed permit* shall mean a *permit* for which all requirements for completion have been satisfied or a *permit* that has been administratively closed by the *building official*.

**105.5.3** For the purposes of this subsection, an *open permit* shall mean a *permit* that has not satisfied all requirements for completion as defined in 105.5.1.1.

**105.6 Denial or revocation.** Whenever a *permit* required under this section is denied or revoked because the plan, or the construction, erection, alteration, modification, repair, or demolition of a building, is found by the local enforcing agency to be not in compliance with the *Florida Building Code*, the local enforcing agency shall identify the specific plan or project features that do not comply with the applicable codes, identify the specific code chapters and sections upon which the finding is based, and provide this information to the *permit* applicant. If the local building code administrator or inspector finds that the plans are not in compliance with the *Florida Building Code*, the local building code administrator or inspector shall identify the specific plan features that do not comply with the applicable codes, identify the specific code chapters and sections upon which the finding is based, and provide this information to the local enforcing agency. The local enforcing agency shall provide this information to the *permit* applicant.

**105.6.1** Pursuant to Section 553.79(16), Florida Statutes, a local enforcement agency may not deny issuance of a building *permit* to; issue a notice of violation to; or fine, penalize, sanction or assess fees against an arm's-length purchaser of a property for value solely because a building *permit* applied for by a previous owner of the property was not closed. The local enforcement agency shall maintain all rights and remedies against the property owner and contractor listed on the *permit*.

**105.6.2** Pursuant to Section 553.79(16), Florida Statutes, a local enforcement agency may not deny issuance of a building *permit* to a contractor solely because the contractor is listed on other building *permits* that were not closed. A local enforcement agency has the authority to deny a new *permit* application from an applicant for other reasons.

**105.7 Placement of *permit*.** The building *permit* or copy shall be kept on the site of the work until the completion of the project.

**105.8 Notice of commencement.** In accordance with Section 713.135, *Florida Statutes*, when any person applies for a building *permit*, the authority issuing such *permit* shall print on the face of each *permit* card in no less than 14-point, capitalized, boldfaced type: "WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. A NOTICE OF COMMENCEMENT MUST BE RECORDED AND POSTED ON THE JOB SITE BEFORE THE FIRST INSPECTION. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

**105.9 Asbestos.** The enforcing agency shall require each building *permit* for the demolition or renovation of an existing structure to contain an asbestos notification statement which indicates the owner's or operator's responsibility to comply with the provisions of Section 469.003, *Florida Statutes*, and to notify the Department of Environmental Protection of his or her intentions to remove asbestos, when applicable, in accordance with state and federal law.

**105.10 Certificate of protective treatment for prevention of termites.** A weather-resistant job-site posting board shall be provided to receive duplicate treatment certificates as each required protective treatment is completed, providing a copy for the person the *permit* is issued to and another copy for the building *permit* files. The treatment certificate shall provide the product used, identity of the applicator, time and date of the treatment, site location, area treated, chemical used, percent concentration and number of gallons used, to establish a verifiable record of protective treatment. If the soil chemical barrier method for termite prevention is used, final exterior treatment shall be completed prior to final building approval.

**105.11 Notice of termite protection.** A permanent sign which identifies the termite treatment provider and need for reinspection and treatment contract renewal shall be provided. The sign shall be posted near the water heater or electric panel.

**105.12 Work starting before *permit* issuance.** Upon approval of the *building official*, the scope of work delineated in the building *permit* application and plan may be started prior to the final approval and issuance of the *permit*, provided any work completed is entirely at risk of the *permit* applicant and the work does not proceed past the

first required inspection.

**105.13 Phased *permit* approval.** After submittal of the appropriate *construction documents*, the *building official* is authorized to issue a *permit* for the construction of foundations or any other part of a building or structure before the *construction documents* for the whole building or structure have been submitted. The holder of such *permit* for the foundation or other parts of a building or structure shall proceed at the holder's own risk with the building operation and without assurance that a *permit* for the entire structure will be granted. Corrections may be required to meet the requirements of the technical codes.

**105.14 *Permit* issued on basis of an affidavit.** Whenever a *permit* is issued in reliance upon an affidavit or whenever the work to be covered by a *permit* involves installation under conditions which, in the opinion of the *building official*, are hazardous or complex, the *building official* shall require that the architect or engineer who signed the affidavit or prepared the drawings or computations shall supervise such work. In addition, they shall be responsible for conformity to the *permit*, provide copies of inspection reports as inspections are performed, and upon completion make and file with the *building official* written affidavit that the work has been done in conformity to the reviewed plans and with the structural provisions of the technical codes. In the event such architect or engineer is not available, the owner shall employ in his stead a competent person or agency whose qualifications are reviewed by the *building official*. The *building official* shall ensure that any person conducting plans review is qualified as a plans examiner under Part XII of Chapter 468, *Florida Statutes*, and that any person conducting inspections is qualified as a building inspector under Part XII of Chapter 468, *Florida Statutes*.

**105.14.1 Affidavits in flood hazard areas.** *Permit* issued on basis of an affidavit shall not extend to the flood load and flood resistance requirements of the *Florida Building Code* and the *building official* shall review an inspect those requirements.

**105.15 Opening protection.** When any activity requiring a building *permit*, not including roof covering replacement or repair work associated with the prevention of degradation of the residence, that is applied for on or after July 1, 2008, and for which the estimated cost is \$50,000 or more for a site built single-family detached residential structure that is located in the wind-borne debris region as defined in this code and that has an insured value of \$750,000 or more, or, if the site built single-family detached residential structure is uninsured or for which documentation of insured value is not presented, has a just valuation for the structure for purposes of ad valorem taxation of \$750,000 or more; opening protections as required within this code or *Florida Building Code, Residential* for new construction shall be provided.

**Exception:** Where defined wind-borne debris regions have not changed, single family detached residential structures permitted subject to the *Florida Building Code* are not required to comply with this section.

**105.16 Inspection of existing residential building not impacted by construction.**

- (a) A local enforcing agency, and any local building code administrator, inspector, or other official or entity, may not require as a condition of issuance of a one- or two-family residential building *permit* the inspection of any portion of a building, structure, or real property that is not directly impacted by the construction, erection, alteration, modification, repair, or demolition of the building, structure, or real property for which the *permit* is sought.
- (b) This subsection does not apply to a building *permit* sought for:
  - 1. A substantial improvement as defined in s. 161.54, *Florida Statutes* or as defined in the *Florida Building Code*.
  - 2. A change of occupancy as defined in the *Florida Building Code*.
  - 3. A conversion from residential to nonresidential or mixed use pursuant to s. 553.507(2)(a), *Florida Statutes* or as defined in the *Florida Building Code*.
  - 4. A historic building as defined in the *Florida Building Code*.
- (c) This subsection does not prohibit a local enforcing agency, or any local building code administrator, inspector, or other official or entity, from:
  - 1. Citing any violation inadvertently observed in plain view during the ordinary course of an inspection conducted in accordance with the prohibition in paragraph (a).
  - 2. Inspecting a physically nonadjacent portion of a building, structure, or real property that is directly impacted by the construction, erection, alteration, modification, repair, or demolition of the building, structure, or real property for which the *permit* is sought in accordance with the prohibition in paragraph (a).

3. Inspecting any portion of a building, structure, or real property for which the owner or other person having control of the building, structure, or real property has voluntarily consented to the inspection of that portion of the building, structure, or real property in accordance with the prohibition in paragraph (a).
4. Inspecting any portion of a building, structure, or real property pursuant to an inspection warrant issued in accordance with ss. 933.20-933.30, *Florida Statutes*.

#### **105.17 Streamlined low-voltage alarm system installation permitting.**

- (1) As used in this section, the term:
  - (a) "Contractor" means a person who is qualified to engage in the business of electrical or alarm system contracting pursuant to a certificate or registration issued by the department under Part II of Chapter 489, *Florida Statutes*.
  - (b) "Low-voltage alarm system project" means a project related to the installation, maintenance, inspection, replacement, or service of a new or existing alarm system, as defined in s. 489.505, *Florida Statutes*, including video cameras and closed-circuit television systems used to signal or detect a burglary, fire, robbery, or medical emergency, that is hardwired and operating at low voltage, as defined in the *National Electrical Code Standard 70*, Current Edition, or a new or existing low-voltage electric fence. The term also includes ancillary components or equipment attached to a low-voltage alarm system, or low-voltage electric fence, including, but not limited to, home-automation equipment, thermostats, closed-circuit television systems, access controls, battery recharging devices, and video cameras.
  - (c) "Low-voltage electric fence" means an alarm system, as defined in s. 489.505, that consists of a fence structure and an energizer powered by a commercial storage battery not exceeding 12 volts which produces an electric charge upon contact with the fence structure.
  - (d) "Wireless alarm system" means a burglar alarm system or smoke detector that is not hardwired.
- (2) Notwithstanding any provision of this code, this section applies to all low-voltage alarm system projects for which a *permit* is required by a local enforcement agency. However, a *permit* is not required to install, maintain, inspect, replace, or service a wireless alarm system, including any ancillary components or equipment attached to the system.
- (3) A low-voltage electric fence must meet all of the following requirements to be permitted as a low-voltage alarm system project and no further *permit* shall be required for the low-voltage alarm system project other than as provided in this section:
  - (a) The electric charge produced by the fence upon contact must not exceed energizer characteristics set forth in paragraph 22.108 and depicted in Figure 102 of International Electrotechnical Commission Standard No. 60335-2-76, Current Edition.
  - (b) A nonelectric fence or wall must completely enclose the low-voltage electric fence. The low-voltage electric fence may be up to 2 feet higher than the perimeter nonelectric fence or wall.
  - (c) The low-voltage electric fence must be identified using warning signs attached to the fence at intervals of not more than 60 feet.
  - (d) The low-voltage electric fence shall not be installed in an area zoned exclusively for single-family or multi-family residential use.
  - (e) The low-voltage electric fence shall not enclose the portions of a property which are used for residential purposes.
- (4) This section does not apply to the installation or replacement of a fire alarm if a plan review is required.
- (5) A local enforcement agency shall make uniform basic *permit* labels available for purchase by a contractor to be used for the installation or replacement of a new or existing alarm system at a cost as indicated in s. 553.793, *Florida Statutes*. The local enforcement agency may not require the payment of any additional fees, charges, or expenses associated with the installation or replacement of a new or existing alarm.
  - (a) A local enforcement agency may not require a contractor, as a condition of purchasing a label, to submit information other than identification information of the licensee and proof of registration or certification as a contractor.
  - (b) A label is valid for 1 year after the date of purchase and may only be used within the jurisdiction of the local enforcement agency that issued the label. A contractor may purchase labels in bulk for one or more unspecified current or future projects.
- (6) A contractor shall post an unused uniform basic *permit* label in a conspicuous place on the premises of the low-voltage alarm system project site before commencing work on the project.
- (7) A contractor is not required to notify the local enforcement agency before commencing work on a low-

voltage alarm system project. However, a contractor must submit a Uniform Notice of a Low-Voltage Alarm System Project as provided under subsection (7) to the local enforcement agency within 14 days after completing the project. A local enforcement agency may take disciplinary action against a contractor who fails to timely submit a Uniform Notice of a Low-Voltage Alarm System Project.

- (8) The Uniform Notice of a Low-Voltage Alarm System Project may be submitted electronically or by facsimile if all submissions are signed by the owner, tenant, contractor, or authorized representative of such persons. The Uniform Notice of a Low-Voltage Alarm System Project shall be in the format prescribed by the local enforcement agency and must comply with the requirements of s. 553.793(7), *Florida Statutes*.
  - (9) A local enforcement agency may coordinate directly with the owner or customer to inspect a low-voltage alarm system to ensure compliance with applicable codes and standards. If a low-voltage alarm system project fails an inspection, the contractor must take corrective action as necessary to pass inspection.
  - (10) A municipality, county, district, or other entity of local government may not adopt or maintain in effect any ordinance or rule regarding a low-voltage alarm system project that is inconsistent with this section.
  - (11) A uniform basic *permit* label shall not be required for the subsequent maintenance, inspection, or service of an alarm system that was permitted in accordance with this section.
- The provisions of this act are not intended to impose new or additional licensure requirements on persons licensed in accordance with the applicable provisions of Chapter 489, *Florida Statutes*.

## SECTION 106 FLOOR AND ROOF DESIGN LOADS

**106.1 Live loads posted.** In commercial or industrial buildings, for each floor or portion thereof designed for *live loads* exceeding 50 psf (2.40 kN/m<sup>2</sup>), such design *live loads* shall be conspicuously posted by the owner or the owner's authorized agent in that part of each *story* in which they apply, using durable signs. It shall be unlawful to remove or deface such notices.

**106.2 Issuance of certificate of occupancy.** A certificate of occupancy required by Section 111 shall not be issued until the floor load signs, required by Section 106.1, have been installed.

**106.3 Restrictions on loading.** It shall be unlawful to place, or cause or *permit* to be placed, on any floor or roof of a building, structure or portion thereof, a load greater than is permitted by this code.

## SECTION 107 SUBMITTAL DOCUMENTS

**107.1 General.** Submittal documents consisting of *construction documents*, statement of *special inspections*, geotechnical report and other data shall be submitted with each *permit* application in accordance with Florida Statute 553.79. The *construction documents* shall be prepared by a *registered design professional* where required by Chapter 471, *Florida Statutes* & 61G15 Florida Administrative Code or Chapter 481, *Florida Statutes* & 61G1 Florida Administrative Code. Where special conditions exist, the *building official* is authorized to require additional *construction documents* to be prepared by a *registered design professional*.

**Exception:** The *building official* is authorized to waive the submission of *construction documents* and other data not required to be prepared by a *registered design professional* if it is found that the nature of the work applied for is such that review of *construction documents* is not necessary to obtain compliance with this code.

**107.2 Construction documents.** *Construction documents* shall be in accordance with Sections 107.2.1 through 107.2.6.

**107.2.1 Information on construction documents.** *Construction documents* shall be dimensioned and drawn upon suitable material. Electronic media documents are permitted to be submitted where *approved* by the *building official*. *Construction documents* shall be of sufficient clarity to indicate the location, nature and extent of the work proposed and show in detail that it will conform to the provisions of this code and relevant laws, ordinances, rules and regulations, as determined by the *building official*. Such drawings and specifications shall contain information, in the form of notes or otherwise, as to the quality of materials, where quality is essential to conformity with the technical codes. Such information shall be specific, and the technical codes shall not be cited as a whole or in part, nor shall the term "legal" or its equivalent be used as a substitute for specific information.



All information, drawings, specifications and accompanying data shall bear the name and signature of the person responsible for the design.

**107.2.2 Fire protection system shop drawings.** Shop drawings for the *fire protection system(s)* shall be submitted to indicate conformance to this code and the *construction documents* and shall be *approved* prior to the start of system installation. Shop drawings shall contain all information as required by the referenced installation standards in Chapter 9.

**107.2.3 Means of egress.** The *construction documents* shall show in sufficient detail the location, construction, size and character of all portions of the *means of egress* including the path of the *exit discharge* to the *public way* in compliance with the provisions of this code. In other than occupancies in Groups R-2, R-3, and I-1, the *construction documents* shall designate the number of occupants to be accommodated on every floor, and in all rooms and spaces.

**107.2.4 Exterior wall envelope.** *Construction documents* for all buildings shall describe the *exterior wall envelope* in sufficient detail to determine compliance with this code. The *construction documents* shall provide details of the *exterior wall envelope* as required, including flashing, intersections with dissimilar materials, corners, end details, control joints, intersections at roof, eaves or parapets, means of drainage, water-resistive membrane and details around openings.

The *construction documents* shall include manufacturer's installation instructions that provide supporting documentation that the proposed penetration and opening details described in the *construction documents* maintain the weather resistance of the *exterior wall envelope*. The supporting documentation shall fully describe

**107.2.5 Exterior balcony and elevated walking surfaces.** Where balcony or other elevated walking surfaces are exposed to water from direct or blowing rain or irrigation, and the structural framing is protected by an impervious moisture barrier, the construction documents shall include details for all elements of the impervious moisture barrier system. The construction documents shall include manufacturer's installation instructions.

**107.2.6 Site plan.** The *construction documents* submitted with the application for *permit* shall be accompanied by a site plan showing to scale the size and location of new construction and existing structures on the site, distances from *lot lines*, the established street grades and the proposed finished grades and, as applicable, *flood hazard areas*, *floodways*, and *design flood elevations*; and it shall be drawn in accordance with an accurate boundary line survey. In the case of demolition, the site plan shall show construction to be demolished and the location and size of existing structures and construction that are to remain on the site or plot. The *building official* is authorized to waive or modify the requirement for a site plan where the application for *permit* is for *alteration* or *repair* or where otherwise warranted.

**107.2.6.1 Design flood elevations.** Where *design flood elevations* are not specified, they shall be established in accordance with Section 1612.3.1.

**107.2.6.2** For the purpose of inspection and record retention, site plans for a building may be maintained in the form of an electronic copy at the worksite. These plans must be open to inspection by the *building official* or a duly authorized representative, as required by the *Florida Building Code*.

**107.2.7 Structural information.** The *construction documents* shall provide the information specified in Section 1603.

**107.3 Examination of documents.** The *building official* shall examine or cause to be examined the accompanying submittal documents and shall ascertain by such examinations whether the construction indicated and described is in accordance with the requirements of this code and other pertinent laws or ordinances.

**Exceptions:**

1. Building plans approved pursuant to Section 553.77(5), *Florida Statutes*, and state-approved manufactured buildings are exempt from local codes enforcing agency plan reviews except for provisions of the code relating to erection, assembly or construction at the site. Erection, assembly and construction at the site are subject to local permitting and inspections. Photocopies of plans approved according to Rule 61-41.009, *Florida Administrative Code*, shall be sufficient for local *permit* application documents of record for the modular building portion of the permitted project.
2. Industrial construction on sites where design, construction and fire safety are supervised by appropriately

licensed design and inspection professionals and which contain adequate in-house fire departments and rescue squads is exempt, subject to approval by the *building official*, from review of plans and inspections, providing the appropriate licensed design and inspection professionals certify that applicable codes and standards have been met and supply appropriate approved drawings to local building and fire-safety inspectors.

**107.3.1 Approval of construction documents.** When the *building official* issues a *permit*, the *construction documents* shall be *approved*, in writing or by stamp, as “Reviewed for Code Compliance.” One set of *construction documents* so reviewed shall be retained by the *building official*. The other set shall be returned to the applicant, shall be kept at the site of work and shall be open to inspection by the *building official* or a duly authorized representative.

**107.3.2 Previous approvals.** This code shall not require changes in the *construction documents*, construction or designated occupancy of a structure for which a lawful *permit* has been heretofore issued or otherwise law- fully authorized, and the construction of which has been pursued in good faith within 180 days after the effective date of this code and has not been abandoned.

**107.3.3 Phased approval.** The *building official* is authorized to issue a *permit* for the construction of foundations or any other part of a building or structure before the *construction documents* for the whole building or structure have been submitted, provided that adequate information and detailed statements have been filed complying with pertinent requirements of this code. The holder of such *permit* for the foundation or other parts of a building or structure shall proceed at the holder’s own risk with the building operation and without assurance that a *permit* for the entire structure will be granted.

**107.3.4 Design professional in responsible charge.** Where it is required that documents be prepared by a *registered design professional*, the *building official* shall be authorized to require the *owner* or the *owner’s* authorized agent to engage and designate on the building *permit* application a *registered design professional* who shall act as the *registered design professional in responsible charge*. If the circumstances require, the *owner* or the *owner’s* authorized agent shall designate a successor *registered design professional in responsible charge* who shall perform the duties required of the original *registered design professional in responsible charge*. The *building official* shall be notified in writing by the *owner* or *owner’s* authorized agent if the *registered design professional in responsible charge* is changed or is unable to continue to perform the duties. Successor *registered design professional in responsible charge* licensed under Chapter 471 Florida Statutes shall comply with Section 471.025(4) Florida Statute and the procedure set forth in 61G15-27.001 Florida Administrative Code; or licensed under Chapter 481 Florida Statutes shall comply with Section 481.221(6) Florida Statute and the procedure set forth in 61G1-18.002 Florida Administrative Code.

The *registered design professional in responsible charge* shall be responsible for reviewing and coordinating submittal documents prepared by others, including phased and deferred submittal items, for compatibility with the design of the building.

**107.3.4.1 Deferred submittals.** For the purposes of this section, deferred submittals are defined as those portions of the design that are not submitted at the time of the application and that are to be submitted to the *building official*.

Deferral of any submittal items shall have the prior approval of the *building official*. The *registered design professional in responsible charge* shall list the deferred submittals on the *construction documents* for review by the *building official*.

Documents for deferred submittal items shall be submitted to the *registered design professional in responsible charge* who shall review them and forward them to the *building official* with a notation indicating that the deferred submittal documents have been reviewed and found to be in general conformance to the design of the building. The deferred submittal items shall not be installed until the deferred submittal documents have been approved by the *building official*.

**107.3.4.2** Certifications by contractors authorized under the provisions of Section 489.115(4)(b), *Florida Statutes*, shall be considered equivalent to sealed plans and specifications by a person licensed under Chapter 471, *Florida Statutes*, or Chapter 481, *Florida Statutes*, by local enforcement agencies for plans review for permitting purposes

relating to compliance with the wind- resistance provisions of the code or alternate methodologies approved by the Florida Building Commission for one- and two-family dwellings. Local enforcement agencies may rely upon such certification by contractors that the plans and specifications submitted conform to the requirements of the code for wind resistance. Upon good cause shown, local government code enforcement agencies may accept or reject plans sealed by persons licensed under Chapters 471, 481 or 489, *Florida Statutes*.

**107.3.5 Minimum plan review criteria for buildings.** The examination of the documents by the *building official* shall include the following minimum criteria and documents: a floor plan; site plan; foundation plan; floor/roof framing plan or truss layout; all fenestration and building envelope penetrations; flashing; and rough opening dimensions; and all exterior elevations:

**Commercial Buildings:**

**Building:**

1. Site requirements:
  - Parking
  - Fire access
  - Vehicle loading
  - Driving/turning radius
  - Fire hydrant/water supply/post indicator valve (PIV)
  - Set back/separation (assumed property lines)
  - Location of specific tanks, water lines and sewer lines
  - Flood hazard areas, flood zones, and design flood elevations*
2. Occupancy group and special occupancy requirements shall be determined (with cross check with the energy code submittal).
3. Minimum type of construction shall be determined (see Table 503).
4. Fire-resistant construction requirements shall include the following components:
  - Fire-resistant separations
  - Fire-resistant protection for type of construction
  - Protection of openings and penetrations of rated walls
  - Fireblocking and draftstopping* and calculated fire resistance
5. Fire suppression systems shall include:
  - Early warning smoke evacuation systems
  - Schematic fire sprinklers
  - Standpipes
  - Pre-engineered systems
  - Riser diagram.
6. Life safety systems shall be determined and shall include the following requirements:
  - Occupant load and egress capacities
  - Early warning
  - Smoke control
  - Stair pressurization
  - Systems schematic
7. Occupancy load/egress requirements shall include:
  - Occupancy load
  - Gross
  - Net
  - Means of egress
  - Exit access
  - Exit
  - Exit discharge
  - Stairs construction/geometry and protection
  - Doors
  - Emergency lighting and exit signs
  - Specific occupancy requirements
  - Construction requirements
  - Horizontal exits/exit passageways
8. Structural requirements shall include:

- Soil conditions/analysis
  - Termite protection
  - Design loads
  - Wind requirements
  - Building envelope
  - Impact resistant coverings or systems
  - Structural calculations (if required)
  - Foundation
  - Flood requirements in accordance with Section 1612, including lowest floor elevations, enclosures, flood damage- resistant materials
  - Wall systems Floor systems
  - Roof systems
  - Threshold inspection plan
  - Stair systems
  - 9. Materials shall be reviewed and shall at a minimum include the following:
    - Wood
    - Steel
    - Aluminum
    - Concrete
    - Plastic
    - Glass
    - Masonry
    - Gypsum board and plaster Insulating (mechanical)
    - Roofing
    - Insulation
    - Building envelope portions of the Energy Code (including calculation and mandatory requirements)
  - 10. Accessibility requirements shall include the following:
    - Site requirements
    - Accessible route
    - Vertical accessibility
    - Toilet and bathing facilities
    - Drinking fountains
    - Equipment
    - Special occupancy requirements
    - Fair housing requirements
  - 11. Interior requirements shall include the following:
    - Interior finishes (flame spread/smoke development)
    - Light and ventilation (including corresponding portion of the energy code)
    - Sanitation
  - 12. Special systems:
    - Elevators
    - Escalators
    - Lifts
  - 13. Swimming pools:
    - Barrier requirements
    - Spas
    - Wading pools
  - 14. Location and installation details. The specific location and installation details of each fire door, fire damper, ceiling damper and smoke damper shall be shown and properly identified on the building plans by the designer.
- Electrical:**
- 1. Electrical:
    - Wiring
    - Services
    - Feeders and branch circuits
    - Overcurrent protection

Grounding  
Wiring methods and materials  
GFCIs

Electrical portions of the Energy Code (including calculation and mandatory requirements)

2. Equipment
3. Special occupancies
4. Emergency systems
5. Communication systems
6. Low voltage
7. Load calculations
8. *Design flood elevation*

**Plumbing:**

1. Minimum plumbing facilities
2. Fixture requirements
3. Water supply piping
4. Sanitary drainage
5. Water heaters
6. Vents
7. Roof drainage
8. Back flow prevention
9. Irrigation
10. Location of water supply line
11. Grease traps
12. Environmental requirements
13. Plumbing riser
14. *Design flood elevation*

15. Water/plumbing portions of the Energy Code (including calculation and mandatory requirements)

**Mechanical:**

1. Mechanical portions of the Energy calculations
2. Exhaust systems:  
Clothes dryer exhaust  
Kitchen equipment exhaust  
Specialty exhaust systems
3. Equipment
4. Equipment location
5. Make-up air
6. Roof-mounted equipment
7. Duct systems
8. Ventilation
9. Combustion air
10. Chimneys, fireplaces and vents
11. Appliances
12. Boilers
13. Refrigeration
14. Bathroom ventilation
15. Laboratory
16. *Design flood elevation*
17. Smoke and/or Fire Dampers

**Gas:**

1. Gas piping
2. Venting
3. Combustion air
4. Chimneys and vents

5. Appliances
6. Type of gas
7. Fireplaces
8. LP tank location
9. Riser diagram/shutoffs
10. *Design flood elevation*
11. Gas portions of the Energy Code (including calculation and mandatory requirements)

**Demolition:**

1. Asbestos removal

**Residential (one- and two-family):**

1. Site requirements:  
Set back/separation (assumed property lines) Location of septic tanks
2. Fire-resistant construction (if required)
3. Fire
4. Smoke and/or carbon monoxide alarm/detector locations
5. Egress:  
Egress window size and location stairs construction requirements
6. Structural requirements shall include:  
Wall section from foundation through roof, including assembly and materials connector tables wind requirements structural calculations (if required)  
Termite protection  
Design loads  
Wind requirements  
Building envelope  
Foundation  
Wall systems  
Floor systems  
Roof systems  
*Flood hazard areas, flood zones, design flood elevations, lowest floor elevations, enclosures, equipment, and flood damage- resistant materials*
7. Accessibility requirements:  
Show/identify  
Accessible bath
8. Impact resistant coverings or systems
9. Residential Energy Code submittal (including calculation and mandatory requirements)

**Manufactured buildings/housing:**

1. Site requirements  
Setback/separation (assumed property lines)  
Location of septic tanks (if applicable)
2. Structural  
Wind zone  
Flood  
Anchoring  
Blocking
3. Plumbing  
List potable water source and meter size (if applicable)
4. Mechanical  
Exhaust systems  
Clothes dryer exhaust  
Kitchen equipment exhaust
5. Electrical exterior disconnect location

**Exemptions:** Plans examination by the *building official* shall not be required for the following work:

1. Replacing existing equipment such as mechanical units, water heaters, etc.

2. Reroofs
3. Minor electrical, plumbing and mechanical repairs
4. Annual maintenance *permits*
5. Prototype plans:  
Except for local site adaptations, siding, foundations and/or modifications.  
Except for structures that require waiver.
6. Manufactured buildings plan except for foundations and modifications of buildings on site and as listed above in manufactured buildings/housing.

**107.4 Amended construction documents.** Work shall be installed in accordance with the *approved construction documents*, and any changes made during construction that are not in compliance with the *approved construction documents* shall be resubmitted for approval as an amended set of *construction documents*.

**107.5 Retention of construction documents.** One set of *approved construction documents* shall be retained by the *building official* for a period of not less than 180 days from date of completion of the permitted work, or as required by state or local laws.

**107.6 Affidavits.** The *building official* may accept a sworn affidavit from a registered architect or engineer stating that the plans submitted conform to the technical codes. For buildings and structures, the affidavit shall state that the plans conform to the laws as to egress, type of construction and general arrangement and, if accompanied by drawings, show the structural design and that the plans and design conform to the requirements of the technical codes as to strength, stresses, strains, loads and stability. The *building official* may without any examination or inspection accept such affidavit, provided the architect or engineer who made such affidavit agrees to submit to the *building official* copies of inspection reports as inspections are performed and upon completion of the structure, electrical, gas, mechanical or plumbing systems a certification that the structure, electrical, gas, mechanical or plumbing system has been erected in accordance with the requirements of the technical codes. Where the *building official* relies upon such affidavit, the architect or engineer shall assume full responsibility for compliance with all provisions of the technical codes and other pertinent laws or ordinances. The *building official* shall ensure that any person conducting plans review is qualified as a plans examiner under Part XII of Chapter 468, *Florida Statutes*, and that any person conducting inspections is qualified as a building inspector under Part XII of Chapter 468, *Florida Statutes*.

**107.6.1 Building permits issued in flood hazard areas on the basis of an affidavit.** Pursuant to the requirements of federal regulation for participation in the National Flood Insurance Program (44 C.F.R. Parts 59 and 60), the authority granted to the *building official* to issue *permits*, to rely on inspections, and to accept plans and *construction documents* on the basis of affidavits and plans submitted pursuant to Sections 105.14 and 107.6, shall not extend to the flood load and flood-resistance construction requirements of the *Florida Building Code*.

**107.6.2 Affidavits Provided Pursuant to Section 553.791, Florida Statutes.** For a building or structure in a *flood hazard area*, the *building official* shall review any affidavit certifying compliance with the flood load and flood-resistant construction requirements of the *Florida Building Code*.

**107.7** If the local building code administrator or inspector finds that the plans are not in compliance with the *Florida Building Code*, the local building code administrator or inspector shall identify the specific plan features that do not comply with the applicable codes, identify the specific code chapters and sections upon which the finding is based, and provide this information to the local enforcing agency. If the building code administrator, plans examiner, or inspector requests another local enforcing agency employee or a person contracted by the local enforcing agency to review the plans and that employee or person identifies specific plan features that do not comply with the applicable codes, the building code administrator, plans examiner, or inspector must provide this information to the local enforcing agency. The local enforcing agency shall provide this information to the permit applicant.

## SECTION 108 TEMPORARY STRUCTURES AND USES

**108.1 General.** The *building official* is authorized to issue a *permit* for temporary structures and temporary uses.

Such *permits* shall be limited as to time of service, but shall not be permitted for more than 180 days. The *building official* is authorized to grant extensions for demonstrated cause.

**108.2 Conformance.** Temporary structures and uses shall comply with the requirements in Section 3103.

**108.3 Temporary power.** The *building official* is authorized to give permission to temporarily supply and use power in part of an electric installation before such installation has been fully completed and the final certificate of completion has been issued. The part covered by the temporary certificate shall comply with the requirements specified for temporary lighting, heat or power in NFPA 70.

**108.4 Termination of approval.** The *building official* is authorized to terminate such *permit* for a temporary structure or use and to order the temporary structure or use to be discontinued.

## SECTION 109 FEES

**109.1 Payment of fees.** A *permit* shall not be valid until the fees prescribed by law have been paid, nor shall an amendment to a *permit* be released until the additional fee, if any, has been paid.

**109.2 Schedule of *permit* fees.** On buildings, structures, electrical, gas, mechanical, and plumbing systems or *alterations* requiring a *permit*, a fee for each *permit* shall be paid as required, in accordance with the schedule as established by the applicable governing authority.

**109.2.1 Types of Fees Enumerated.** Fees may be charged for but not limited to the following:

1. *Permits*;
2. Plans examination;
3. Certificates of competency (including fees for applications, examinations, renewal, late renewal, and reciprocity);
4. Re-inspections;
5. Administrative fees (including fees for investigative and legal costs incurred in the context of certain disciplinary cases heard by the board);
6. Variance requests;
7. Administrative appeals;
8. Violations; and
9. Other fees as established by local resolution or ordinance.

**109.3 Building permit valuations.** The applicant for a *permit* shall provide an estimated *permit* value at time of application. *Permit* valuations shall include total value of work, including materials and labor, for which the *permit* is being issued, such as electrical, gas, mechanical, plumbing equipment and permanent systems. If, in the opinion of the *building official*, the valuation is underestimated on the application, the *permit* shall be denied, unless the applicant can show detailed estimates to meet the approval of the *building official*. Final building *permit* valuation shall be set by the *building official*.

**109.4 Work commencing before *permit* issuance.** Any person who commences any work on a building, structure, electrical, gas, mechanical or plumbing system before obtaining the necessary *permits* or without prior approval from the *building official* as permitted in Section 105.2.2 or 105.12 shall be subject to a fee established by the *building official* that shall be in addition to the required *permit* fees or as provided by local ordinance. This provision shall not apply to emergency work when delay would clearly have placed life or property in imminent danger. But in all such cases the required *permit(s)* must be applied for within three (3) business days and any unreasonable delay in obtaining those *permit(s)* shall result in the charge of a double fee. The payment of a double fee shall not preclude or be deemed a substitute for prosecution for commencing work without first obtaining a *permit*. The *building official* may grant extensions of time or waive fees when justifiable cause has been demonstrated in writing.

**109.5 Related fees.** The payment of the fee for the construction, *alteration*, removal or demolition for work done in connection to or concurrently with the work authorized by a building *permit* shall not relieve the applicant or holder of the *permit* from the payment of other fees that are prescribed by law.



**109.6 Refunds.** The *building official* is authorized to establish a refund policy.

## SECTION 110 INSPECTIONS

**110.1 General.** Construction or work for which a *permit* is required shall be subject to inspection by the *building official* and such construction or work shall remain exposed and provided with access for inspection purposes until *approved*. Approval as a result of an inspection shall not be construed to be an approval of a violation of the provisions of this code or of other ordinances of the jurisdiction. Inspections presuming to give authority to violate or cancel the provisions of this code or of other ordinances of the jurisdiction shall not be valid. It shall be the duty of the *owner* or the *owner's* authorized agent to cause the work to remain exposed and provided with access for inspection purposes. The *building official* shall be permitted to require a boundary line survey prepared by a Florida licensed professional surveyor and mapper whenever the boundary lines cannot be readily determined in the field. Neither the *building official* nor the jurisdiction shall be liable for expense entailed in the removal or replacement of any material required to allow inspection.

**110.1.1 Manufacturers and fabricators.** When deemed necessary by the *building official*, he/she shall make, or cause to be made, an inspection of materials or assemblies at the point of manufacture or fabrication. A record shall be made of every such examination and inspection and of all violations of the technical codes.

**110.1.2 Inspection service.** The *building official* may make, or cause to be made, the inspections required by Section 110. He or she may accept reports of department inspectors, independent inspectors or of recognized inspection services, provided that after investigation he/she is satisfied as to their licensure, qualifications and reliability. A certificate required by any provision of this code shall not be based on such reports unless the same are recorded by the building code inspector or the architect or engineer performing building code inspections in a manner specified by the *building official*. The *building official* shall ensure that all persons making such inspections shall be certified in accordance to Chapter 468 Florida Statutes; or licensed under Chapter 471 or 481 Florida Statutes.

**110.2 Preliminary inspection.** Before issuing a *permit*, the *building official* is authorized to examine or cause to be examined buildings, structures and sites for which an application has been filed.

**110.3 Required inspections.** The *building official* upon notification from the *permit* holder or his or her agent shall make the following inspections, or any other such inspection as deemed necessary and shall either release that portion of the construction or shall notify the *permit* holder or his or her agent of any violations which must be corrected in order to comply with the technical codes. The *building official* shall determine the timing and sequencing of when inspections occur and what elements are inspected at each inspection.

### Building

1. Foundation inspection. To be made after trenches are excavated, any required reinforcing steel is in place, forms erected and shall at a minimum include the following building components:
  - Stem-wall
  - Monolithic slab-on-grade
  - Piling/pile caps
  - Footers/grade beams
  - 1.1. Slab Inspection: Concrete slab and under-floor inspections shall be made after in-slab or under-floor reinforcing steel and building service equipment, conduit, piping accessories and other ancillary equipment items are in place, but before any concrete is placed or floor sheathing installed, including the subfloor.
  - 1.2. A foundation/form board survey prepared and certified by a Florida licensed professional surveyor and mapper may be required, prior to approval of the slab inspection. The survey shall certify placement of the building on the site, illustrate all surrounding setback dimensions and shall be available at the job site for review by the building inspector. In lieu of providing a survey, the contractor may elect to uncover all property line markers and string-up all property lines in preparation for inspection.
  - 1.3. In *flood hazard areas*, upon placement of the lowest floor, including basement, and prior to further vertical construction, the elevation certification shall be submitted to the *building official*.
2. Framing inspection. To be made after the roof, all framing, *fireblocking* and bracing is in place, all concealing wiring, all pipes, chimneys, ducts and vents are complete and the rough electrical, plumbing, heating wires,

pipes and ducts are *approved* and shall at a minimum include the following building components:

Window/door framing

Window U-factor/SHGC (as indicated on *approved* energy calculations)

Vertical cells/columns

Lintel/tie beams

Framing/trusses/bracing/connectors (including truss layout and engineered drawings)

*Draftstopping/fireblocking*

Curtain wall framing

Energy insulation (Insulation R-factor as indicated on *approved* energy calculations)

Accessibility

Verify rough opening dimensions are within tolerances.

Window/door buck attachment

2.1 Insulation Inspection: To be made after the framing inspection is *approved* and the insulation is in place, according to *approved* energy calculation submittal. Includes wall and ceiling insulation.

2.2 Lath and gypsum board inspection for fire-resistance rated or shear assemblies. Lath and gypsum board inspections shall be made after lathing and gypsum board, interior and exterior, is in place, but before ant plastering is applied or gypsum board joints and fasteners are taped and finished.

3. Sheathing inspection. To be made either as part of a dry-in inspection or done separately at the request of the contractor after all roof and wall sheathing and fasteners are complete and shall at a minimum include the following building components:

Roof sheathing

Wall sheathing

Continuous air barrier

Exterior siding/cladding

Sheathing fasteners

Roof/wall dry-in

Sheathing fasteners installed and found to be missing the structural member (shiners) shall be removed and properly reinstalled prior to installation of the dry-in material.

4. Exterior wall coverings. Shall at a minimum include the following building components in progress inspections:  
Exterior wall coverings and veneers  
Soffit coverings
5. Roofing inspection. Shall at a minimum be made in at least two inspections and include the following building components:

Dry-in

Insulation

Roof coverings (including In Progress as necessary)

Insulation on roof deck (according to submitted energy calculation)

Flashing

5.1 Re-roof sheathing inspection. An affidavit with a notarized signature of a state or locally licensed roofing contractor for the installation of additional sheathing fasteners as required by the Existing Building Code may be accepted at the discretion of the *building official*.

6. Final inspection. To be made after the building is completed and ready for occupancy.  
6.1. In *flood hazard areas*, as part of the final inspection, a final certification of the lowest floor elevation or the elevation to which a building is dry floodproofed, as applicable, shall be submitted to the authority having jurisdiction.
7. Swimming pool inspection. First inspection to be made after excavation and installation of reinforcing steel, bonding and main drain and prior to placing of concrete.
  1. Steel reinforcement inspection
  2. Underground electric inspection
  3. Underground piping inspection including a pressure test.
  4. Underground electric inspection under deck area (including the equipotential bonding)
  5. Underground piping inspection under deck area

6. Deck inspection: to be made prior to installation of the deck material (with forms, deck drains, and any reinforcement in place)
7. Safety Inspection; Made prior to filling the pool with the bonding connections made, the proper drain covers installed and the final barriers installed.
8. Final pool piping
9. Final Electrical inspection
10. Final inspection to be made when the swimming pool is complete and all required enclosure requirements are in place.

In order to pass final inspection and receive a certificate of completion, a residential swimming pool must meet the requirements relating to pool safety features as described in Section 454.2.17 of this code.

8. Demolition inspections. First inspection to be made after all utility connections have been disconnected and secured in such manner that no unsafe or unsanitary conditions shall exist during or after demolition operations.  
Final inspection to be made after all demolition work is completed.
9. Manufactured building inspections. The building department shall inspect construction of foundations; connecting buildings to foundations; installation of parts identified on plans as site installed items, joining the modules, including utility cross-overs; utility connections from the building to utility lines on site; and any other work done on site which requires compliance with the *Florida Building Code*. Additional inspections may be required for public educational facilities (see Section 453.27.20 of this code).
10. Where impact-resistant coverings or impact-resistant systems are installed, the *building official* shall schedule adequate inspections of impact-resistant coverings or impact-resistant systems to determine the following:  
The system indicated on the plans was installed.  
The system is installed in accordance with the manufacturer's installation instructions and the product approval.

#### Electrical

1. Underground inspection. To be made after trenches or ditches are excavated, conduit or cable installed, and before any backfill is put in place.
2. Rough-in inspection. To be made after the roof, framing, *fireblocking* and bracing is in place and prior to the installation of wall or ceiling membranes.
3. Final inspection. To be made after the building is complete, all required electrical fixtures are in place and properly connected or protected, and the structure is ready for occupancy.
4. Existing Swimming Pools. To be made after all repairs or alterations are complete, all required electrical equipment, GFCI protection, and equipotential bonding are in place on said alterations or repairs.

#### Plumbing

1. Underground inspection. To be made after trenches or ditches are excavated, piping installed, and before any backfill is put in place.
2. Rough-in inspection. To be made after the roof, framing, *fireblocking* and bracing is in place and all soil, waste and vent piping is complete, and prior to this installation of wall or ceiling membranes.  
*Includes plumbing provisions of the energy code and approved energy calculation provisions.*
3. Final inspection. To be made after the building is complete, all plumbing fixtures are in place and properly connected, and the structure is ready for occupancy.

**Note:** See Section 312 of the *Florida Building Code, Plumbing* for required tests.

#### Mechanical

1. Underground inspection. To be made after trenches or ditches are excavated, underground duct and fuel piping installed, and before any backfill is put in place.
2. Rough-in inspection. To be made after the roof, framing, *fireblocking* and bracing are in place and all ducting, and other concealed components are complete, and prior to the installation of wall or ceiling membranes.  
*Includes mechanical provisions of the energy code and approved energy calculation provisions.*
3. Final inspection. To be made after the building is complete, the mechanical system is in place and properly connected, and the structure is ready for occupancy.

#### Gas

1. Rough piping inspection. To be made after all new piping authorized by the permit has been installed, and before any such piping has been covered or concealed or any fixtures or gas appliances have been connected.  
*Includes gas provisions of the energy code and approved energy calculation provisions.*
2. Final piping inspection. To be made after all piping authorized by the *permit* has been installed and after all

portions which are to be concealed by plastering or otherwise have been so concealed, and before any fixtures or gas appliances have been connected. This inspection shall include a pressure test.

3. Final inspection. To be made on all new gas work authorized by the *permit* and such portions of existing systems as may be affected by new work or any changes, to ensure compliance with all the requirements of this code and to assure that the installation and construction of the gas system is in accordance with reviewed plans.

#### **Site Debris**

1. The contractor and/or owner of any active or inactive construction project shall be responsible for the clean-up and removal of all construction debris or any other miscellaneous discarded articles during the course of the construction project and prior to receiving final inspection approval. Construction job sites must be kept clean and in a safe condition at all times.
2. All debris shall be kept in such a manner as to prevent it from being spread by any means.

#### **110.3.1 Footing and foundation inspection.**

Footing and foundation inspections shall be made after excavations for footings are complete and any required reinforcing steel is in place. For concrete foundations, any required forms shall be in place prior to inspection. Materials for the foundation shall be on the job, except where concrete is ready mixed in accordance with ASTM C 94, the concrete need not be on the job.

**110.3.2 Concrete slab and under-floor inspection.** Concrete slab and under-floor inspections shall be made after in-slab or under-floor reinforcing steel and building service equipment, conduit, piping accessories and other ancillary equipment items are in place, but before any concrete is placed or floor sheathing installed, including the subfloor.

**110.3.3 Lowest floor elevation.** In *flood hazard areas*, upon placement of the lowest floor, including the basement, and prior to further vertical construction, the elevation certification required in Section 1612.4 of the Florida Building Code, Building and Section R322 of the Florida Building Code, Residential, shall be submitted to the *building official*.

**110.3.4 Frame inspection.** Framing inspections shall be made after the roof deck or sheathing, all framing, *fireblocking* and bracing are in place and pipes, chimneys and vents to be concealed are complete and the rough electrical, plumbing, heating wires, pipes and ducts are *approved*.

**110.3.5 Lath, gypsum board and gypsum panel product inspection.** Lath, gypsum board and gypsum panel product inspections shall be made after lathing, gypsum board and gypsum panel products, interior and exterior, are in place, but before any plastering is applied or gypsum board and gypsum panel product joints and fasteners are taped and finished.

**Exception:** Gypsum board and gypsum panel products that are not part of a fire-resistance-rated assembly or a shear assembly.

**110.3.6 Weather-exposed balcony and walking surface waterproofing.** Where balcony or other elevated walking surfaces are exposed to water from direct or blowing rain or irrigation, and the structural framing is protected by an impervious moisture barrier, all elements of the impervious-moisture-barrier system shall not be concealed until inspected and *approved*.

**110.3.7 Fire and smoke-resistant penetrations.** Protection of joints and penetrations in *fire-resistance-rated* assemblies, *smoke barriers* and smoke partitions shall not be concealed from view until inspected and *approved*.

**110.3.8 Energy efficiency inspections.** Inspections shall be made to determine compliance with *FBC, Energy Conservation* and confirm with the *approved energy code submittal* (by appropriate trade) and corresponding mandatory requirements and shall include, but not be limited to, inspections for: corresponding envelope insulation R- and U-values, fenestration U-value, and Solar Heat Gain Coefficient, duct system R-value, and HVAC, lighting, electrical and water-heating equipment efficiency.

**110.3.9 Other inspections.** In addition to the inspections specified in Sections 110.3 through 110.3.8, the *building official* is authorized to make or require other inspections of any construction work to ascertain compliance with the provisions of this code and other laws that are enforced by the department of building safety.

**110.3.10 Special inspections.** See section 110.10 of this code.

**110.3.11 Final inspection.** The final inspection shall be made after all work required by the building *permit* is completed.

**110.3.11.1 Flood hazard documentation.**

If located in a *flood hazard area*, documentation as required in Section 1612.5 of the Florida Building Code, Building; or Section R322 of the Florida Building Code, Residential, shall be submitted to the *building official* prior to the final inspection.

**110.3.11.2 Commercial Energy Code documentation.** If required by energy code path submittal, confirmation that commissioning result requirements have been received by building owner.

**110.3.11.3 Residential Energy Code documentation.** If required by energy code path submittal (R405), confirmation that the envelope and duct test requirements shall be received by *building official*.

**110.3.12 Termites.** Building components and building surroundings required to be protected from termite damage in accordance with Section 1503.7, Section 2304.12.9 or Section 2304.12.4, specifically required to be inspected for termites in accordance with Section 2114, or required to have chemical soil treatment in accordance with Section 1816 shall not be covered or concealed until the release from the *building official* has been received.

**110.3.13 Impact-resistant coverings or systems.** Where impact-resistant coverings or systems are installed to meet requirements of this code, the *building official* shall schedule adequate inspections of impact-resistant coverings or systems to determine the following:

1. The system indicated on the plans was installed.
2. The system is installed in accordance with the manufacturer's installation instructions and the product approval.

**110.4 Inspection agencies.** The *building official* is authorized to accept reports of *approved* inspection agencies, provided such agencies satisfy the requirements as to qualifications and reliability.

**110.5 Inspection requests.** It shall be the duty of the holder of the building *permit* or their duly authorized agent to notify the *building official* when work is ready for inspection. It shall be the duty of the *permit* holder to provide access to and means for inspections of such work that are required by this code.

**110.6 Approval required.** Work shall not be done beyond the point indicated in each successive inspection without first obtaining the approval of the *building official*. The *building official*, upon notification, shall make the requested inspections and shall either indicate the portion of the construction that is satisfactory as completed, or notify the *permit* holder or his or her agent wherein the same fails to comply with this code. Any portions that do not comply shall be corrected and such portion shall not be covered or concealed until authorized by the *building official*.

**110.7 Shoring.** For threshold buildings, shoring and associated formwork or falsework shall be designed and inspected by a Florida licensed professional engineer prior to any required mandatory inspections by the threshold building inspector.

**110.8 Threshold building.**

**110.8.1** During new construction or during repair or restoration projects in which the structural system or structural loading of a building is being modified, the enforcing agency shall require a special inspector to perform structural inspections on a threshold building pursuant to a structural inspection plan prepared by the engineer or architect of record. The structural inspection plan must be submitted to the enforcing agency prior to the issuance of a building *permit* for the construction of a threshold building. The purpose of the structural inspection plans is to provide specific inspection procedures and schedules so that the building can be adequately inspected for compliance with the permitted documents. The special inspector may not serve as a surrogate in carrying out the responsibilities of the *building official*, the architect, or the engineer of record. The contractor's contractual or statutory obligations are not relieved by any action of the special inspector.

**110.8.2** The special inspector shall determine that a professional engineer who specializes in shoring design has inspected the shoring and reshoring for conformance with the shoring and reshoring plans submitted to the enforcing agency. A fee simple title owner of a building, which does not meet the minimum size, height,

occupancy, occupancy classification, or number-of-stories criteria which would result in classification as a threshold building under s. 553.71(7), *Florida Statutes* may designate such building as a threshold building, subject to more than the minimum number of inspections required by the *Florida Building Code*.

**110.8.3** The fee owner of a threshold building shall select and pay all costs of employing a special inspector, but the special inspector shall be responsible to the enforcement agency. The inspector shall be a person certified, licensed or registered under Chapter 471, *Florida Statutes*, as an engineer or under Chapter 481, *Florida Statutes*, as an architect.

**110.8.4** Each enforcement agency shall require that, on every threshold building:

**110.8.4.1** The special inspector, upon completion of the building and prior to the issuance of a certificate of occupancy, file a signed and sealed statement with the enforcement agency in substantially the following form: "To the best of my knowledge and belief, the above-described construction of all structural load-bearing components complies with the permitted documents, and the shoring and reshoring conforms to the shoring and reshoring plans submitted to the enforcement agency."

**110.8.4.2** Any proposal to install an alternate structural product or system to which building codes apply be submitted to the enforcement agency for review for compliance with the codes and made part of the enforcement agency's recorded set of *permit* documents.

**110.8.4.3** All shoring and reshoring procedures, plans and details be submitted to the enforcement agency for recordkeeping. Each shoring and reshoring installation shall be supervised, inspected and certified to be in compliance with the shoring documents by the contractor.

**110.8.4.4** All plans for the building which are required to be signed and sealed by the architect or engineer of record contain a statement that, to the best of the architect's or engineer's knowledge, the plans and specifications comply with the applicable minimum building codes and the applicable fire-safety standards as determined by the local authority in accordance with this section and Chapter 633, *Florida Statutes*.

**110.8.5** No enforcing agency may issue a building *permit* for construction of any threshold building except to a licensed general contractor, as defined in Section 489.105(3)(a), *Florida Statutes*, or to a licensed building contractor, as defined in Section 489.105(3)(b), *Florida Statutes*, within the scope of her or his license. The named contractor to whom the building *permit* is issued shall have the responsibility for supervision, direction, management and control of the construction activities on the project for which the building *permit* was issued.

**110.8.6** The building department may allow a special inspector to conduct the minimum structural inspection of threshold buildings required by this code, Section 553.73, *Florida Statutes*, without duplicative inspection by the building department. The *building official* is responsible for ensuring that any person conducting inspections is qualified as a building inspector under Part XII of Chapter 468, *Florida Statutes*, or certified as a special inspector under Chapter 471 or 481, *Florida Statutes*. Inspections of threshold buildings required by Section 553.79(5), *Florida Statutes*, are in addition to the minimum inspections required by this code.

## **110.9 Mandatory structural inspections for condominium and cooperative buildings.**

**110.9.1 General.** The Legislature finds that maintaining the structural integrity of a building throughout the life of the building is of paramount importance in order to ensure that buildings are structurally sound so as to not pose a threat to the public health, safety, or welfare. As such, the Legislature finds that the imposition of a statewide structural inspection program for aging condominium and cooperative buildings in this state is necessary to ensure that such buildings are safe for continued use.

### **110.9.2. As used in this section, the terms:**

(a) "Milestone inspection" means a structural inspection of a building, including an inspection of load-bearing elements and the primary structural members and primary structural systems as those terms are defined in s. 627.706, *Florida Statutes*, by an architect licensed under chapter 481 or engineer licensed under chapter 471 authorized to practice in this state for the purposes of attesting to the life safety and adequacy of the structural components of the building and, to the extent reasonably possible, determining the general structural condition of the building as it affects the safety of such building, including a determination of any necessary maintenance, repair, or replacement of any structural component of the building. The purpose of

such inspection is not to determine if the condition of an existing building is in compliance with the Florida Building Code or the fire safety code. The milestone inspection services may be provided by a team of professionals with an architect or engineer acting as a registered design professional in responsible charge with all work and reports signed and sealed by the appropriate qualified team member.

(b) “Substantial structural deterioration” means substantial structural distress or substantial structural weakness that negatively affects a building’s general structural condition and integrity. The term does not include surface imperfections such as cracks, distortion, sagging, deflections, misalignment, signs of leakage, or peeling of finishes unless the licensed engineer or architect performing the phase one or phase two inspection determines that such surface imperfections are a sign of substantial structural deterioration.

**110.9.3.** (a) An owner or owners of a building that is three stories or more in height as determined by the Florida Building Code and that is subject, in whole or in part, to the condominium or cooperative form of ownership as a residential condominium under chapter 718, Florida Statutes, or a residential cooperative under chapter 719, Florida Statutes, must have a milestone inspection performed by December 31 of the year in which the building reaches 30 years of age, based on the date the certificate of occupancy for the building was issued, and every 10 years thereafter. If a building reached 30 years of age before July 1, 2022, the building’s initial milestone inspection must be performed before December 31, 2024. If a building reaches 30 years of age on or after July 1, 2022, and before December 31, 2024, the building’s initial milestone inspection must be performed before December 31, 2025. If the date of issuance for the certificate of occupancy is not available, the date of issuance of the building’s certificate of occupancy shall be the date of occupancy evidenced in any record of the local building official.

(b) The local enforcement agency may determine that local circumstances, including environmental conditions such as proximity to salt water as defined in s. 379.101, require that a milestone inspection must be performed by December 31 of the year in which the building reaches 25 years of age, based on the date the certificate of occupancy for the building was issued, and every 10 years thereafter.

(c) The local enforcement agency may extend the date by which a building’s initial milestone inspection must be completed upon a showing of good cause by the owner or owners of the building that the inspection cannot be timely completed if the owner or owners have entered into a contract with an architect or engineer to perform the milestone inspection and the inspection cannot reasonably be completed before the deadline or other circumstance to justify an extension.

(d) The local enforcement agency may accept an inspection report prepared by a licensed engineer or architect for a structural integrity and condition inspection of a building performed before July 1, 2022, if the inspection and report substantially comply with the requirements of this section. Notwithstanding when such inspection was completed, the condominium or cooperative association must comply with the unit owner notice requirements in Section 110.9.9. The inspection for which an inspection report is accepted by the local enforcement agency under this paragraph is deemed a milestone inspection for the applicable requirements in chapters 718 and 719. If a previous inspection and report is accepted by the local enforcement agency under this paragraph, the deadline for the building’s subsequent 10-year milestone inspection is based on the date of the accepted previous inspection.

**110.9.4.** The milestone inspection report must be arranged by a condominium or cooperative association and any owner of any portion of the building which is not subject to the condominium or cooperative form of ownership. The condominium association or cooperative association and any owner of any portion of the building which is not subject to the condominium or cooperative form of ownership are each responsible for ensuring compliance with the requirements of this section. The condominium association or cooperative association is responsible for all costs associated with the milestone inspection attributable to the portions of a building which the association is responsible to maintain under the governing documents of the association. This section does not apply to a single-family, two-family, or three-family dwelling with three or fewer habitable stories above ground.

**110.9.5.** Upon determining that a building must have a milestone inspection, the local enforcement agency must provide written notice of such required inspection to the condominium association or cooperative association and any owner of any portion of the building which is not subject to the

condominium or cooperative form of ownership, as applicable, by certified mail, return receipt requested. The condominium or cooperative association must notify the unit owners of the required milestone inspection within 14 days after receipt of the written notice from the local enforcement agency and provide the date that the milestone inspection must be completed. Such notice may be given by electronic submission to unit owners who consent to receive notice by electronic submission or by posting on the association's website.

**110.9.6.** Phase one of the milestone inspection must be completed within 180 days after the owner or owners of the building receive the written notice under Section 110.9.5. For purposes of this section, completion of phase one of the milestone inspection means the licensed engineer or architect who performed the phase one inspection submitted the inspection report by e-mail, United States Postal Service, or commercial delivery service to the local enforcement agency.

**110.9.7.** A milestone inspection consists of two phases:

**110.9.7.1.** For phase one of the milestone inspection, a licensed architect or engineer authorized to practice in this state shall perform a visual examination of habitable and nonhabitable areas of a building, including the major structural components of a building, and provide a qualitative assessment of the structural conditions of the building. If the architect or engineer finds no signs of substantial structural deterioration to any building components under visual examination, phase two of the inspection, as provided in Section 110.9.7.2, is not required. An architect or engineer who completes a phase one milestone inspection shall prepare and submit an inspection report pursuant to Section 110.9.8.

**110.9.7.2.** A phase two of the milestone inspection must be performed if any substantial structural deterioration is identified during phase one. A phase two inspection may involve destructive or nondestructive testing at the inspector's direction. The inspection may be as extensive or as limited as necessary to fully assess areas of structural distress in order to confirm that the building is structurally sound and safe for its intended use and to recommend a program for fully assessing and repairing distressed and damaged portions of the building. When determining testing locations, the inspector must give preference to locations that are the least disruptive and most easily repairable while still being representative of the structure. If a phase two inspection is required, within 180 days after submitting a phase one inspection report the architect or engineer performing the phase two inspection must submit a phase two progress report to the local enforcement agency with a timeline for completion of the phase two inspection. An inspector who completes a phase two milestone inspection shall prepare and submit an inspection report pursuant to Section 110.9.8.

**110.9.8.** Upon completion of a phase one or phase two milestone inspection, the architect or engineer who performed the inspection must submit a sealed copy of the inspection report with a separate summary of, at minimum, the material findings and recommendations in the inspection report to the condominium association or cooperative association, to any other owner of any portion of the building which is not subject to the condominium or cooperative form of ownership, and to the *building official* of the local government which has jurisdiction. The inspection report must, at a minimum, meet all of the following criteria:

- (a) Bear the seal and signature, or the electronic signature, of the licensed engineer or architect who performed the inspection.
- (b) Indicate the manner and type of inspection forming the basis for the inspection report.
- (c) Identify any substantial structural deterioration, within a reasonable professional probability based on the scope of the inspection, describe the extent of such deterioration, and identify any recommended repairs for such deterioration.
- (d) State whether unsafe or dangerous conditions, as those terms are defined in the Florida Building Code, were observed.
- (e) Recommend any remedial or preventive repair for any items that are damaged but are not substantial structural deterioration.
- (f) Identify and describe any items requiring further inspection.



**110.9.9.** Within 45 days after receiving the applicable inspection report, the condominium or cooperative association must distribute a copy of the inspector-prepared summary of the inspection report to each condominium unit owner or cooperative unit owner, regardless of the findings or recommendations in the report, by United States mail or personal delivery at the mailing address, property address, or any other address of the owner provided to fulfill the association's notice requirements under chapter 718 or chapter 719, as applicable, and by electronic transmission to the e-mail address or facsimile number provided to fulfill the association's notice requirements to unit owners who previously consented to receive notice by electronic transmission; must post a copy of the inspector-prepared summary in a conspicuous place on the condominium or cooperative property; and must publish the full report and inspector-prepared summary on the association's website, if the association is required to have a website.

**110.9.10.** A local enforcement agency may prescribe timelines and penalties with respect to compliance with this section.

**110.9.11.** A board of county commissioners or municipal governing body may adopt an ordinance requiring that a condominium or cooperative association and any other owner that is subject to this section schedule or commence repairs for substantial structural deterioration within a specified timeframe after the local enforcement agency receives a phase two inspection report; however, such repairs must be commenced within 365 days after receiving such report. If an owner of the building fails to submit proof to the local enforcement agency that repairs have been scheduled or have commenced for substantial structural deterioration identified in a phase two inspection report within the required timeframe, the local enforcement agency must review and determine if the building is unsafe for human occupancy.

#### **110.10 Special Building Inspector.**

**110.10.1** The Building Official may require the owner to employ a special inspector for the inspection of the structural framework, or any part thereof, as herein required:

**110.10.1.1** Buildings or structures or part thereof of unusual size, height, design or method of construction and critical structural connections.

1. Placement of Piling.
2. Windows, glass doors, external protection devices and curtain walls on buildings when such systems are over two (2) stories in height
3. The method or pace of construction requires continuous inspection.
4. In the opinion of the Building Official, any other additional inspections that are required.

**110.10.2** The Building Official shall require the owner to employ a special building inspector for the inspections herein required:

**110.10.2.1** Precast Concrete Units.

**110.10.2.2** Reinforced unit masonry above two (2) stories

**110.10.2.3** Steel Connections – bolt torquing and welding

**110.10.2.4** Metal Building Systems over two (2) stories

**110.10.2.5** Smoke Control Systems.

**110.10.2.6** Tilt Up Wall Panel System Reinforcement and Connection

**110.10.2.7** Soil Compaction and any other requirement of the Geotechnical Report

**110.10.2.8** Compound Floor Systems

**110.10.3** The person employed by the owner as a Special Building Inspector shall be subject to verification of qualifications by the Building Official.

**110.10.4** The Building Official shall require that the Architect or Engineer of record submit an inspection plan which shall specify the scope and nature of inspections to be performed. The special building inspector or their authorized representative shall make all inspections in accordance with the approved inspection plan.

**110.10.5** The special building inspector shall be an Architect or Engineer or their duly authorized representative. For projects utilizing a Private Provider as permitted by State of Florida Statutes, the provider may conduct special inspections if the provider offers these types of services.

Exception 1: Special building inspector for Smoke control systems shall meet the qualifications required in FBC 909.18.8.2.

**110.10.6** The special building inspector shall be responsible for compliance with the applicable portions of the permitted construction documents as delineated in the special building inspection plan and shall submit inspection reports to the Building Official. Structural inspections performed by the special building inspector shall satisfy the requirements for mandatory inspections by the FBC.

**110.10.7** At the completion of the work, the special building inspector shall submit a signed and sealed Certificate of Compliance to the Building Official, stating that the work was done, substantially in accordance with the applicable portions of the permitted construction documents as delineated in the special building inspection plan.

Exception: Reports for Smoke Control Systems shall comply with FBC 909.18.8.3 Reports, and FBC 909.18.8.3.1 Report filing.

## SECTION 111 CERTIFICATE OF OCCUPANCY

**111.1 Use and occupancy.** A building or structure shall not be used or occupied, and a change in the existing use or occupancy classification of a building or structure or portion thereof shall not be made, until the *building official* has issued a certificate of occupancy therefor as provided herein. Issuance of a certificate of occupancy shall not be construed as an approval of a violation of the provisions of this code or of other ordinances of the jurisdiction.

**Exception:** Certificates of occupancy are not required for work exempt from *permits* in accordance with Section 105.2.

**111.2 Certificate issued.** After the *building official* inspects the building or structure and does not find violations of the provisions of this code or other laws that are enforced by the department of building safety, the *building official* shall issue a certificate of occupancy that contains the following:

1. The building *permit* number.
2. The address of the structure.
3. The name and address of the *owner* or the owner's authorized agent.
4. A description of that portion of the structure for which the certificate is issued.
5. A statement that the described portion of the structure has been inspected for compliance with the requirements of this code for the occupancy and division of occupancy and the use for which the proposed occupancy is classified.
6. For buildings and structures in *flood hazard areas*, a statement that documentation of the as-built lowest floor elevation has been provided and is retained in the records of the *building official*.
7. The name of the *building official*.
8. The edition of the code under which the *permit* was issued.
9. The use and occupancy, in accordance with the provisions of Chapter 3.
10. The type of construction as defined in Chapter 6.
11. The design *occupant load*.
12. If an *automatic sprinkler system* is provided, whether the sprinkler system is required.
13. Any special stipulations and conditions of the building *permit*.

**111.3 Temporary occupancy.** The *building official* is authorized to issue a temporary certificate of occupancy before the completion of the entire work covered by the *permit*, provided that such portion or portions shall be occupied safely. The *building official* shall set a time period during which the temporary certificate of occupancy is valid.

**111.4 Revocation.** The *building official* is authorized to, in writing, suspend or revoke a certificate of occupancy or completion issued under the provisions of this code wherever the certificate is issued in error, or on the basis of incorrect information supplied, or where it is determined that the building or structure or portion thereof is in violation of any ordinance or regulation or any of the provisions of this code.

**111.5 Certificate of completion.** A certificate of completion is proof that a structure or system is complete and for certain types of *permits* is released for use and may be connected to a utility system. This certificate does not grant authority to occupy a building, such as shell building, prior to the issuance of a certificate of occupancy.

## SECTION 112 SERVICE UTILITIES

**112.1 Connection of service utilities.** A person shall not make connections from a utility, source of energy, fuel or power to any building or system that is regulated by this code for which a *permit* is required, until released by the *building official*.

**112.2 Temporary connection.** The *building official* shall have the authority to authorize the temporary connection of the building or system to the utility, source of energy, fuel or power.

**112.3 Authority to disconnect service utilities.** The *building official* shall have the authority to authorize disconnection of utility service to the building, structure or system regulated by this code and the referenced codes and standards set forth in Section 101.4 in case of emergency where necessary to eliminate an immediate hazard to life or property or where such utility connection has been made without the approval required by Section 112.1 or 112.2. The *building official* shall notify the serving utility, and wherever possible the *owner* and occupant of the building, structure or service system of the decision to disconnect prior to taking such action. If not notified prior to disconnecting, the *owner* or occupant of the building, structure or service system shall be notified in writing, as soon as practical thereafter.

## SECTION 113 BOARD OF APPEALS

**113.1 General.** Appeals relating to the Florida Building Code must be appealed to the Florida Building Commission.

## SECTION 114 VIOLATIONS

**114.1 Unlawful acts.** It shall be unlawful for any person, firm or corporation to erect, construct, alter, extend, repair, move, remove, demolish or occupy any building, structure or equipment regulated by this code, or cause same to be done, in conflict with or in violation of any of the provisions of this code.

**114.2 Notice of violation.** The *building official* is authorized to serve a notice of violation or order on the person responsible for the erection, construction, *alteration*, extension, repair, moving, removal, demolition or occupancy of a building or structure in violation of the provisions of this code, or in violation of a *permit* or certificate issued under the provisions of this code. Such order shall direct the discontinuance of the illegal action or condition and the abatement of the violation.

**114.3 Prosecution of violation.** If the notice of violation is not complied with promptly, the *building official* is authorized to request the legal counsel of the jurisdiction to institute the appropriate proceeding at law or in equity to restrain, correct or abate such violation, or to require the removal or termination of the unlawful occupancy of the building or structure in violation of the provisions of this code or of the order or direction made pursuant thereto.

**114.4 Violation penalties.** Any person who violates a provision of this code or fails to comply with any of the requirements thereof or who erects, constructs, alters or repairs a building or structure in violation of the *approved construction documents* or directive of the *building official*, or of a *permit* or certificate issued under the

provisions of this code, shall be subject to penalties as prescribed by law.

## SECTION 115 STOP WORK ORDER

**115.1 Authority.** Where the *building official* finds any work regulated by this code being performed in a manner either contrary to the provisions of this code or dangerous or unsafe, the *building official* is authorized to issue a stop work order.

**115.2 Issuance.** The stop work order shall be in writing and shall be given to the *owner* of the property involved, the owner's authorized agent or the person performing the work. Upon issuance of a stop work order, the cited work shall immediately cease. The stop work order shall state the reason for the order and the conditions under which the cited work will be permitted to resume.

**115.3 Unlawful continuance.** Any person who shall continue any work after having been served with a stop work order, except such work as that person is directed to perform to remove a violation or unsafe condition, shall be subject to penalties as prescribed by law.

## SECTION 116 UNSAFE STRUCTURES AND EQUIPMENT

**116.1 Conditions.** Structures or existing equipment that are or hereafter become unsafe, insanitary or deficient because of inadequate *means of egress* facilities, inadequate light and ventilation, or which constitute a fire hazard, or are otherwise dangerous to human life or the public welfare, or that involve illegal or improper occupancy or inadequate maintenance, shall be deemed an unsafe condition. Unsafe structures shall be taken down and removed or made safe, as the *building official* deems necessary and as provided for in this section. A vacant structure that is not secured against entry shall be deemed unsafe.

**116.2 Record.** The *building official* shall cause a report to be filed on an unsafe condition. The report shall state the occupancy of the structure and the nature of the unsafe condition.

**116.3 Notice.** If an unsafe condition is found, the *building official* shall serve on the owner, agent or person in control of the structure, a written notice that describes the condition deemed unsafe and specifies the required repairs or improvements to be made to abate the unsafe condition, or that requires the unsafe structure to be demolished within a stipulated time. Such notice shall require the person thus notified to declare immediately to the *building official* acceptance or rejection of the terms of the order.

**116.4 Method of service.** Such notice shall be deemed properly served if a copy thereof is (a) delivered to the owner personally; (b) sent by certified or registered mail addressed to the owner at the last known address with the return receipt requested; or (c) delivered in any other manner as prescribed by local law. If the certified or registered letter is returned showing that the letter was not delivered, a copy thereof shall be posted in a conspicuous place in or about the structure affected by such notice. Service of such notice in the foregoing manner upon the owner's agent or upon the person responsible for the structure shall constitute service of notice upon the owner.

**116.5 Restoration.** Where the structure or equipment determined to be unsafe by the *building official* is restored to a safe condition, to the extent that repairs, *alterations* or *additions* are made or a change of occupancy occurs during the restoration of the structure, such *repairs, alterations, additions* and change of occupancy shall comply with the requirements of Section 105.2.2 and the *Florida Building Code, Existing Building*.

## SECTION 117 VARIANCES IN FLOOD HAZARD AREAS

**117.1 Flood hazard areas.** Pursuant to Section 553.73(5), *Florida Statutes*, the variance procedures adopted in the local flood plain management ordinance shall apply to requests submitted to the *building official* for variances to the provisions of Section 1612.4 of the *Florida Building Code, Building* or, as applicable, the provisions of Section R322 of the *Florida Building Code, Residential*. This section shall not apply to Section 3109 of the *Florida Building Code, Building*.

## 210.52 Dwelling Unit Receptacle Outlets.

This section provides requirements for 125-volt, 15- and 20-ampere receptacle outlets. The receptacles required by this section shall be in addition to any receptacle that is as follows:

- (1) Part of a luminaire or appliance, or
- (2) Controlled by a listed wall-mounted control device in accordance with 210.70(A)(1), Exception No. 1, or
- (3) Located within cabinets or cupboards, or
- (4) Located more than 1.7 m (5½ ft) above the floor.

Permanently installed electric baseboard heaters equipped with factory-installed receptacle outlets or outlets provided as a separate assembly by the manufacturer shall be permitted as the required outlet or outlets for the wall space utilized by such permanently installed heaters. Such receptacle outlets shall not be connected to the heater circuits.

Informational Note: Listed baseboard heaters include instructions that may not permit their installation below receptacle outlets.

### **(A) General Provisions.**

In every kitchen, family room, dining room, living room, parlor, library, den, sunroom, bedroom, recreation room, or similar room or area of dwelling units, receptacle outlets shall be installed in accordance with the general provisions specified in 210.52(A)(1) through (A)(4).

#### **(1) Spacing.**

Receptacles shall be installed such that no point measured horizontally along the floor line of any wall space is more than 1.8 m (6 ft) from a receptacle outlet.

#### **(2) Wall Space.**

As used in this section, a wall space shall include the following:

- (1) Any space 600 mm (2 ft) or more in width (including space measured around corners) and unbroken along the floor line by doorways and similar openings, fireplaces, stationary appliances, and fixed cabinets that do not have countertops or similar work surfaces.
- (2) The space occupied by fixed panels in walls, excluding sliding panels.
- (3) The space afforded by fixed room dividers, such as freestanding bar-type counters or railings.

### **(3) Floor Receptacles.**

Receptacle outlets in or on floors shall not be counted as part of the required number of receptacle outlets unless located within 450 mm (18 in.) of the wall.

### **(4) Countertop and Similar Work Surface Receptacle Outlets.**

Receptacles installed for countertop and similar work surfaces as specified in 210.52(C) shall not be considered as the receptacle outlets required by 210.52(A).

### **(B) Small Appliances.**

#### **(1) Receptacle Outlets Served.**

In the kitchen, pantry, breakfast room, dining room, or similar area of a dwelling unit, the two or more 20-ampere small-appliance branch circuits required by 210.11(C)(1) shall serve all wall and floor receptacle outlets covered by 210.52(A), all countertop outlets covered by 210.52(C), and receptacle outlets for refrigeration equipment.

*Exception No. 1: In addition to the required receptacles specified by 210.52, switched receptacles supplied from a general-purpose 15- or 20-ampere branch circuit shall be permitted in accordance with 210.70(A)(1), Exception No. 1.*

*Exception No. 2: In addition to the required receptacles specified by 210.52, a receptacle outlet to serve a specific appliance shall be permitted to be supplied from an individual branch circuit rated 15 amperes or greater.*

#### **(2) No Other Outlets.**

The two or more small-appliance branch circuits specified in 210.52(B)(1) shall have no other outlets.

*Exception No. 1: A receptacle installed solely for the electrical supply to and support of an electric clock in any of the rooms specified in 210.52(B)(1) shall be permitted to be served by a small-appliance branch circuit.*

*Exception No. 2: Receptacles installed to provide power for supplemental equipment and lighting on gas-fired ranges, ovens, or counter-mounted cooking units shall be permitted to be served by a small-appliance branch circuit.*

### **(3) Kitchen Receptacle Requirements.**

Receptacles installed in a kitchen to serve countertop surfaces shall be supplied by not fewer than two small-appliance branch circuits, either or both of which shall also be permitted to supply receptacle outlets in the same kitchen and in other rooms specified in 210.52(B)(1). Additional small-appliance branch circuits shall be permitted to supply receptacle outlets in the

kitchen and other rooms specified in **210.52(B)(1)**. No small-appliance branch circuit shall serve more than one kitchen.

### **(C) Countertops and Work Surfaces.**

In kitchens, pantries, breakfast rooms, dining rooms, and similar areas of dwelling units, receptacle outlets for countertop and work surfaces that are 300 mm (12 in.) or wider shall be installed in accordance with **210.52(C)(1)** through (C)(3) and shall not be considered as the receptacle outlets required by **210.52(A)**.


For the purposes of this section, where using multioutlet assemblies, each 300 mm (12 in.) of multioutlet assembly containing two or more receptacles installed in individual or continuous lengths shall be considered to be one receptacle outlet.

#### **(1) Wall Spaces.**

Receptacle outlets shall be installed so that no point along the wall line is more than 600 mm (24 in.) measured horizontally from a receptacle outlet in that space. The location of the receptacles shall be in accordance with **210.52(C)(3)**.

*Exception No. 1: Receptacle outlets shall not be required directly behind a range, counter-mounted cooking unit, or sink in the installation described in **Figure 210.52(C)(1)**.*

*Exception No. 2: Where a required receptacle outlet cannot be installed in the wall areas shown in **Figure 210.52(C)(1)**, the receptacle outlet shall be permitted to be installed as close as practicable to the countertop area to be served. The total number of receptacle outlets serving the countertop shall not be less than the number needed to satisfy **210.52(C)(1)**. These outlets shall be located in accordance with **210.52(C)(3)**.*

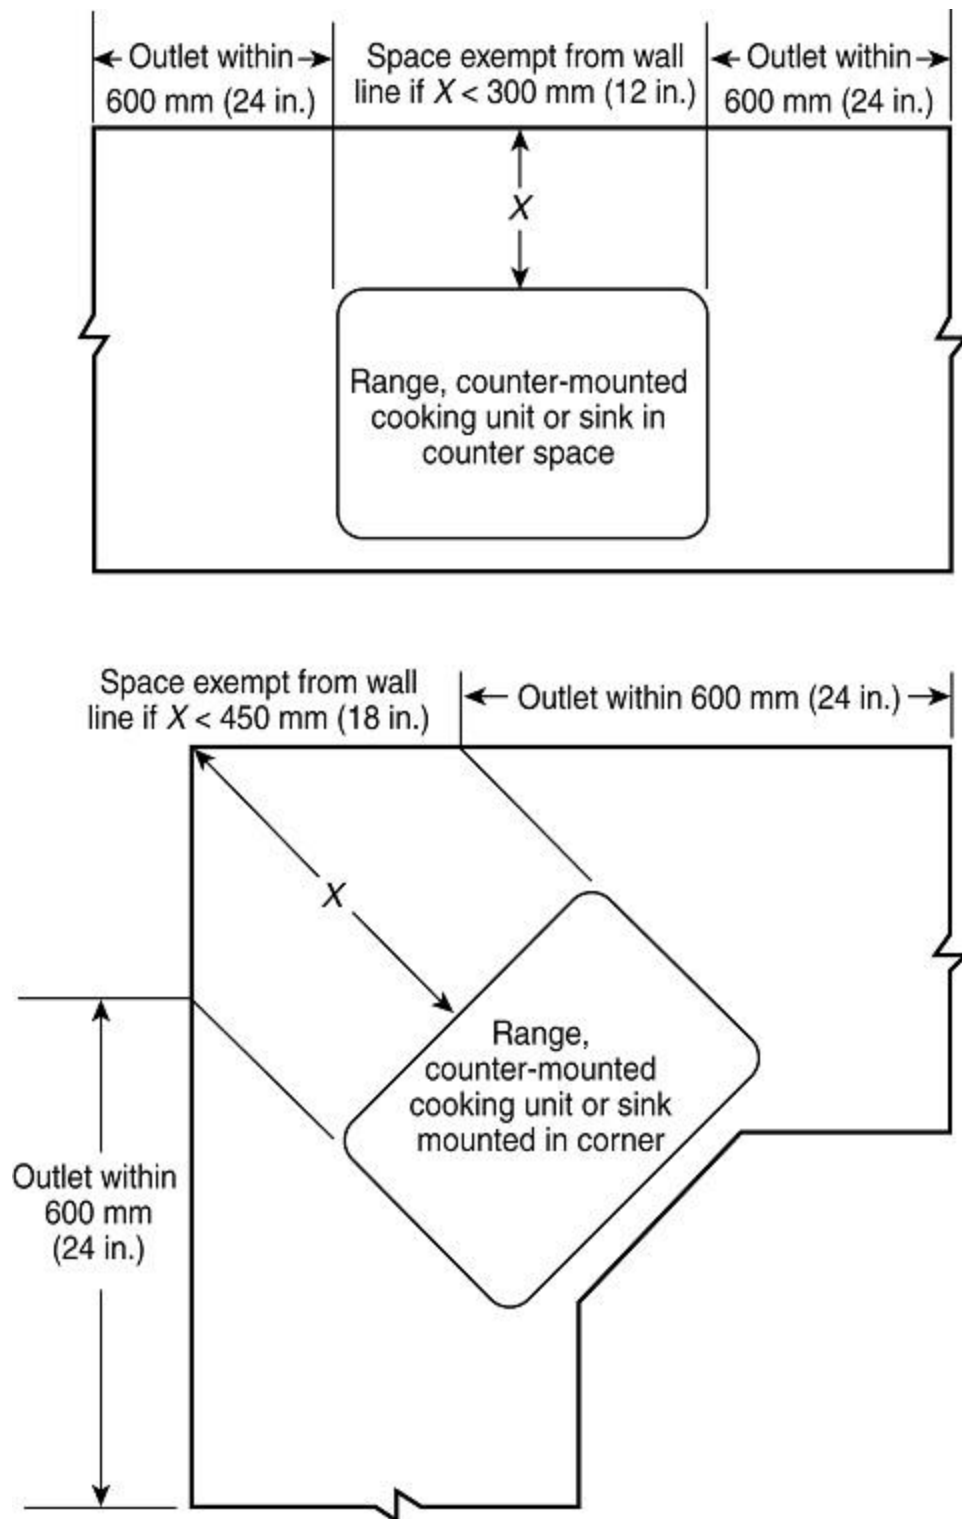

**Figure 210.52(C)(1)** Determination of Area Behind a Range, Counter-Mounted Cooking Unit, or Sink.



## **(2) Island and Peninsular Countertops and Work Surfaces.**

Receptacle outlets, if installed to serve an island or peninsular countertop or work surface, shall be installed in accordance with **210.52(C)(3)**. If a receptacle outlet is not provided to serve an island or peninsular countertop or work surface, provisions shall be provided at the island or peninsula for future addition of a receptacle outlet to serve the island or peninsular countertop or work surface.

## **(3) Receptacle Outlet Location.**

Receptacle outlets shall be located in one or more of the following:

- (1) On or above, but not more than 500 mm (20 in.) above, a countertop or work surface
- (2) In a countertop using receptacle outlet assemblies listed for use in countertops
- (3) In a work surface using receptacle outlet assemblies listed for use in work surfaces or listed for use in countertops

Receptacle outlets rendered not readily accessible by appliances fastened in place, appliance garages, sinks, or rangetops as covered in **210.52(C)(1)**, Exception No. 1, or appliances occupying assigned spaces shall not be considered as these required outlets.

Informational Note No. 1: See **406.5(E)** for installation of receptacles in countertops and **406.5(F)** for installation of receptacles in work surfaces. See **380.10** for installation of multioutlet assemblies.

Informational Note No. 2: See Informative Annex J and ANSI/ICC A117.1-2009, *Standard on Accessible and Usable Buildings and Facilities*, for additional information.

## **(D) Bathrooms.**

At least one receptacle outlet shall be installed in bathrooms within 900 mm (3 ft) of the outside edge of each sink. The receptacle outlet shall be located on a wall or partition that is adjacent to the sink or sink countertop, located on the countertop, or installed on the side or face of the sink cabinet. In no case shall the receptacle be located more than 300 mm (12 in.) below the top of the sink or sink countertop. Receptacle outlet assemblies listed for use in countertops shall be permitted to be installed in the countertop.

Informational Note: See **406.5(E)** and **406.5(G)** for requirements on installation of receptacles in countertops.

### **(E) Outdoor Outlets.**

Outdoor receptacle outlets shall be installed in accordance with **210.52(E)(1)** through (E)(3).

#### **(1) One-Family and Two-Family Dwellings.**

For a one-family dwelling and each unit of a two-family dwelling that is at grade level, at least one receptacle outlet readily accessible from grade and not more than 2.0 m (6 1/2 ft) above grade level shall be installed at the front and back of the dwelling.

#### **(2) Multifamily Dwellings.**

For each dwelling unit of a multifamily dwelling where the dwelling unit is located at grade level and provided with individual exterior entrance/egress, at least one receptacle outlet readily accessible from grade and not more than 2.0 m (6 1/2 ft) above grade level shall be installed.

#### **(3) Balconies, Decks, and Porches.**

Balconies, decks, and porches that are within 102 mm (4 in.) horizontally of the dwelling unit shall have at least one receptacle outlet accessible from the balcony, deck, or porch. The receptacle outlet shall not be located more than 2.0 m (6 1/2 ft) above the balcony, deck, or porch walking surface.

### **(F) Laundry Areas.**

In dwelling units, at least one receptacle outlet shall be installed in areas designated for the installation of laundry equipment.

*Exception No. 1: A receptacle for laundry equipment shall not be required in a dwelling unit of a multifamily building where laundry facilities are provided on the premises for use by all building occupants.*

*Exception No. 2: A receptacle for laundry equipment shall not be required in other than one-family dwellings where laundry facilities are not to be installed or permitted.*

### **(G) Basements, Garages, and Accessory Buildings.**

For one- and two-family dwellings, and multifamily dwellings, at least one receptacle outlet shall be installed in the areas specified in **210.52(G)(1)** through (G)(3). These receptacles shall be in addition to receptacles required for specific equipment. Receptacles supplying only a permanently installed premises security system shall not be considered as meeting these requirements.

**(1) Garages.**

In each attached garage and in each detached garage with electric power, at least one receptacle outlet shall be installed in each vehicle bay and not more than 1.7 m (5½ ft) above the floor.

*Exception: Garage spaces not attached to an individual dwelling unit of a multifamily dwelling shall not require a receptacle outlet in each vehicle bay.*

**(2) Accessory Buildings.**

In each accessory building with electric power.

**(3) Basements.**

In each separate unfinished portion of a basement.

**(H) Hallways.**

In dwelling units, hallways of 3.0 m (10 ft) or more in length shall have at least one receptacle outlet.

As used in this subsection, the hallway length shall be considered the length along the centerline of the hallway without passing through a doorway.

**(I) Foyers.**

Foyers that are not part of a hallway in accordance with **210.52(H)** and that have an area that is greater than 5.6 m<sup>2</sup> (60 ft<sup>2</sup>) shall have a receptacle(s) located in each wall space 900 mm (3 ft) or more in width. Doorways, door-side windows that extend to the floor, and similar openings shall not be considered wall space.